Single | Full | Over | Two-way | Lock | Self close | In/out | Bumper | Stopper



- Material : SPCC
- Finished : Zinc plated
- T : 8.0 mm ± 0.3
- W :20.0mm ±0.3
- Load :5~10kg/set
- Type : Single extension slide
- Standard : 200mm ~550mm

1.使用材料
a)Outer Member(1.35t),Inner Member(1.2t):SPCC
b)Retainer(0.5t):SECC(電気亜鉛鍍金鋼板)
2.表面処理
a)Zinc galvanizing(Cr3)
3.潤滑油`
a)JX日鉱日石(JX Nippon Oil &Energy) EPNOC AP

RoHs 対応品

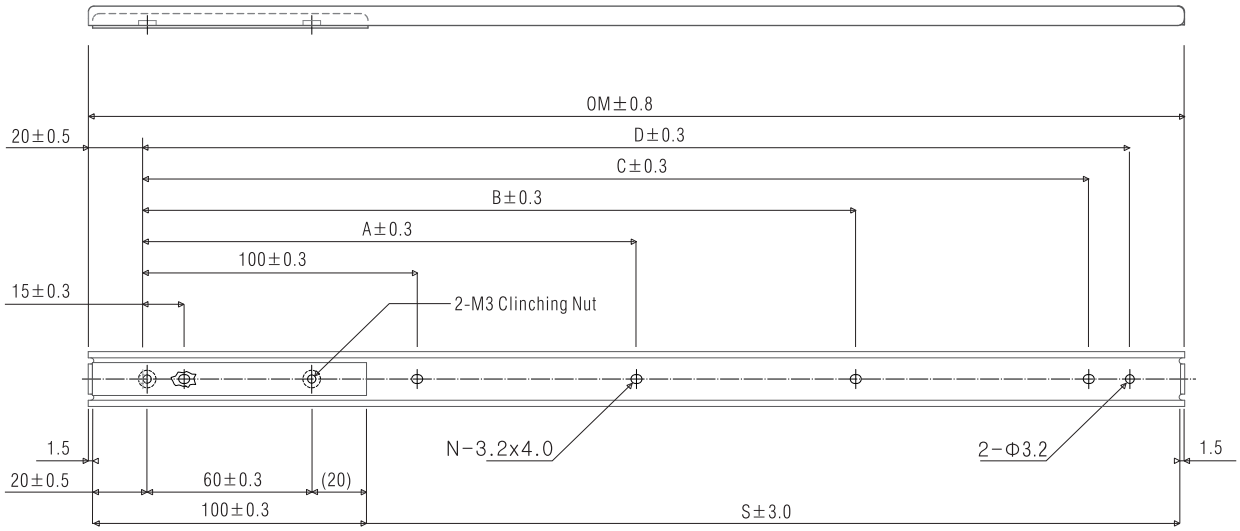

OM:Outer Member IM:Inner Member S:Stroke

ITEM	OM mm	S mm	A mm	B mm	C mm	D mm						
20	200	97	-	-	145	160						
25	250	147	-	-	195	210						
30	300	197	-	160	245	260						
35	350	247	-	210	295	310						
40	400	297	-	260	345	360						
45	450	347	205	310	395	410						
50	500	397	230	360	445	460						
55	550	447	255	410	495	510						

Single | Full | Over | Two-way | Lock | Self close | In/out | Bumper | Stopper



- Material : SPCC
- Finished : Zinc plated
- T : 16.1mm ± 0.5
- W :20.0mm ±0.3
- Load :15~25kg/set
- Type : Full extension slide
- Standard : 200mm ~550mm

RoHs 対応品

1.使用材料
a)Outer Member(1.35t),Inner Member(1.2t):SPCC
b)Retainer(0.5t):SECC(電気亜鉛鍍金鋼板)
2.表面処理
a)Zinc galvanizing(Cr3)
3.潤滑油`
a)JX日鉱日石(JX Nippon Oil &Energy) EPNOC AP

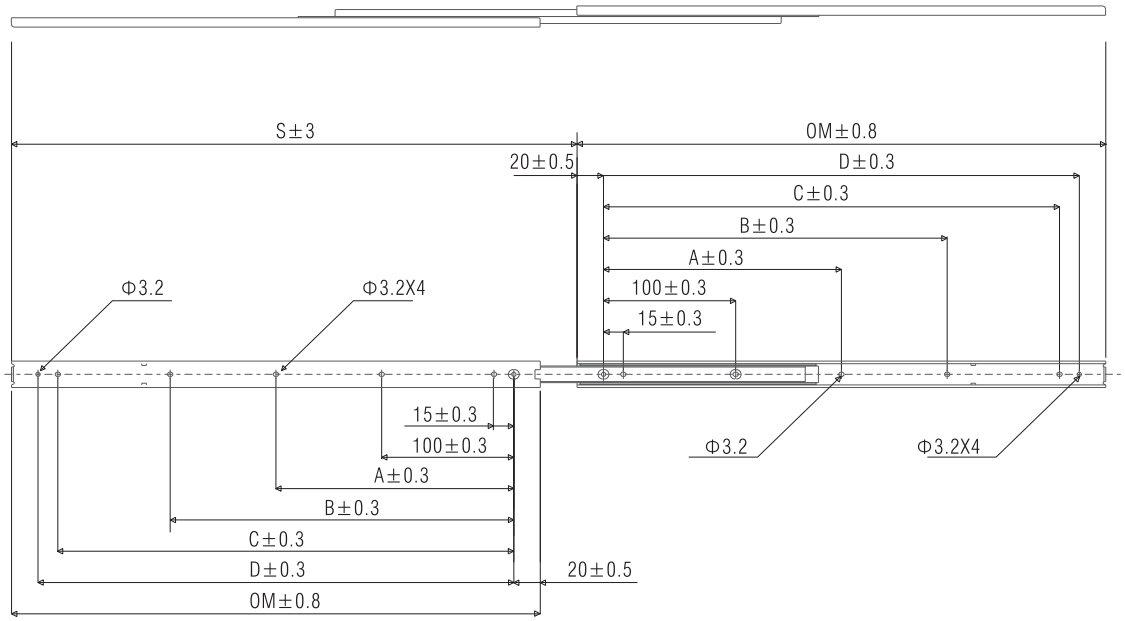

OM:Outer Member IM:Inner Member S:Stroke

ITEM	OM mm	S mm	A mm	B mm	C mm	D mm						
20	200	231	-	-	145	160						
25	250	280	-	-	195	210						
30	300	329	-	160	245	260						
35	350	379	-	210	295	310						
40	400	428	-	260	345	360						
45	450	477	205	310	395	410						
50	500	526	230	360	445	460						
55	550	575	255	410	495	510						

Single Full Over Two-way Lock Self close In/out Bumper Stopper



- Material : SPCC
- Finished : Zinc plated
- T : 8.0 mm± 0.3
- W :20.0mm ±0.3
- Load :5～10kg/set
- Type : Single extension slide
- Standard : 200mm ～550mm

1.使用材料
a)Outer Member(1.35t),Inner Member(1.2t):SPCC
b)Retainer(0.5t):SECC(電気亜鉛鍍金鋼板)
2.表面処理
a)Zinc galvanizing(Cr3)
3.潤滑油`
a)JX日鉱日石(JX Nippon Oil &Energy) EPNOC AP

RoHs 対応品

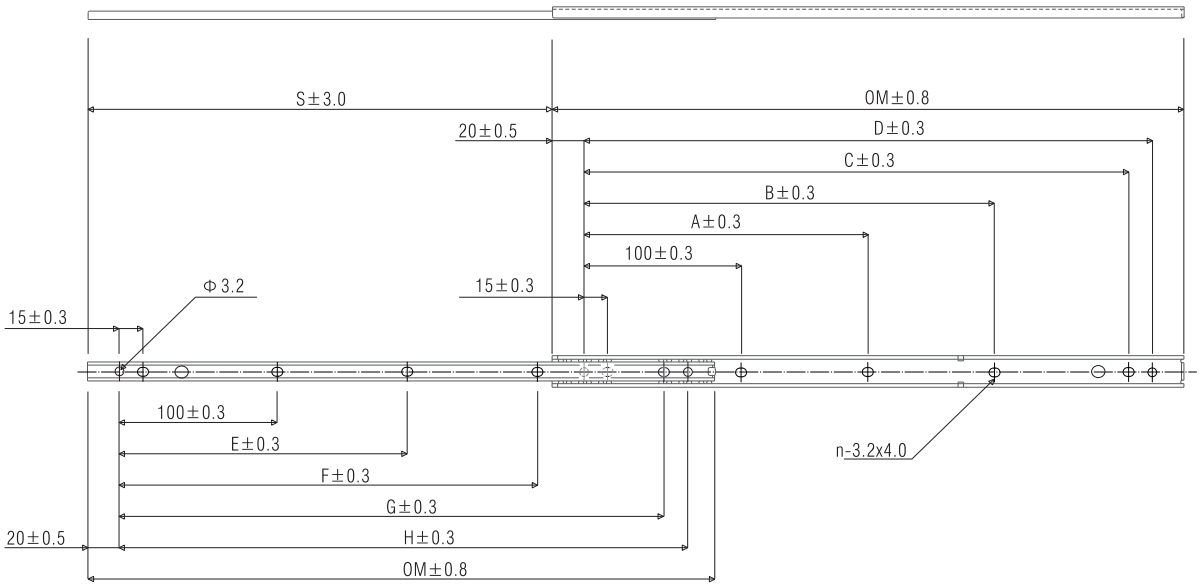

OM:Outer Member IM:Inner Member S:Stroke

ITEM	OM mm	IM mm	S mm	A mm	B mm	C,G mm	D,H mm	E mm	F mm			
20	200	197	132	-	-	145	160	-	-			
25	250	247	182	-	-	195	210	-	150			
30	300	297	220	-	160	245	260	-	190			
35	350	347	257	-	210	295	310	-	225			
40	400	397	294	-	260	345	360	-	265			
45	450	447	331	205	310	395	410	190	300			
50	500	497	381	230	360	445	460	225	337			
55	550	547	419	255	410	495	510	265	377			

Single Full Over Two-way Lock Self close In/out Bumper Stopper



- Material : SPCC
- Finished : Zinc plated
- T : 9.5 mm± 0.3
- W :27.0mm ±0.3
- Load :20～30kg/set
- Type : Single extension slide
- Standard : 200mm ～500mm

1.使用材料
a)Outer Member(1.4t),Inner Member(1.4t):SPCC
b)Retainer(0.5t):SECC(電気亜鉛鍍金鋼板)
2.表面処理
a)Zinc galvanizing(Cr3)
3.潤滑油`
a)JX日鉱日石(JX Nippon Oil &Energy) EPNOC AP

RoHs 対応品

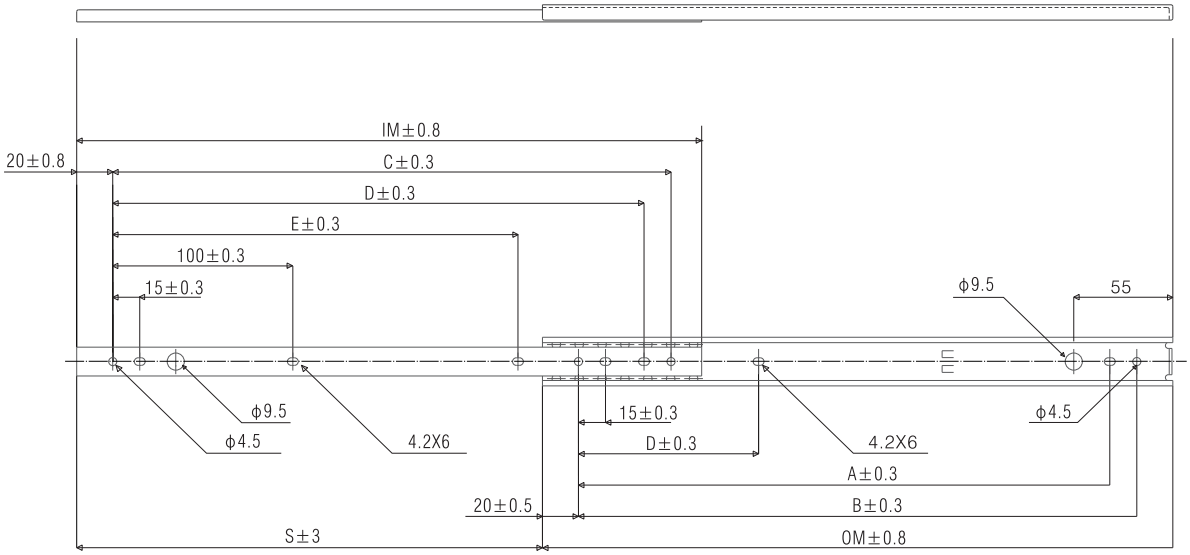

OM:Outer Member IM:Inner Member S:Stroke

ITEM	OM mm	IM mm	S mm	A mm	B mm	C mm	D mm	E mm				
20	200	197	134	145.0	160.0	160.0	145.0	---				
25	250	247	184	195.0	210.0	210.0	195.0	150.0				
30	300	297	221	245.0	260.0	260.0	245.0	190.0				
35	350	347	259	295.0	310.0	310.0	295.0	225.0				
40	400	397	296	345.0	360.0	360.0	345.0	265.0				
45	450	447	333	395.0	410.0	410.0	395.0	300.0				
50	500	497	371	445.0	460.0	460.0	445.0	337.0				

Single | Full | Over | Two-way | Lock | Self close | In/out | Bumper | Stopper



- Material : SPCC
- Finished : Zinc plated
- T : 9.5mm ± 0.3
- W :27.0mm ±0.3
- Load :20~30kg/set
- Type : Single extension slide
- Standard : 300mm ~550mm

1.使用材料
a)Outer Member(1.4t),Inner Member(1.4t):SPCC
b)Retainer(0.5t):SECC(電気亜鉛鍍金鋼板)
2.表面処理
a)Zinc galvanizing(Cr3)
3.潤滑油`
a)JX日鉱日石(JX Nippon Oil &Energy) EPNOC AP

RoHs 対応品

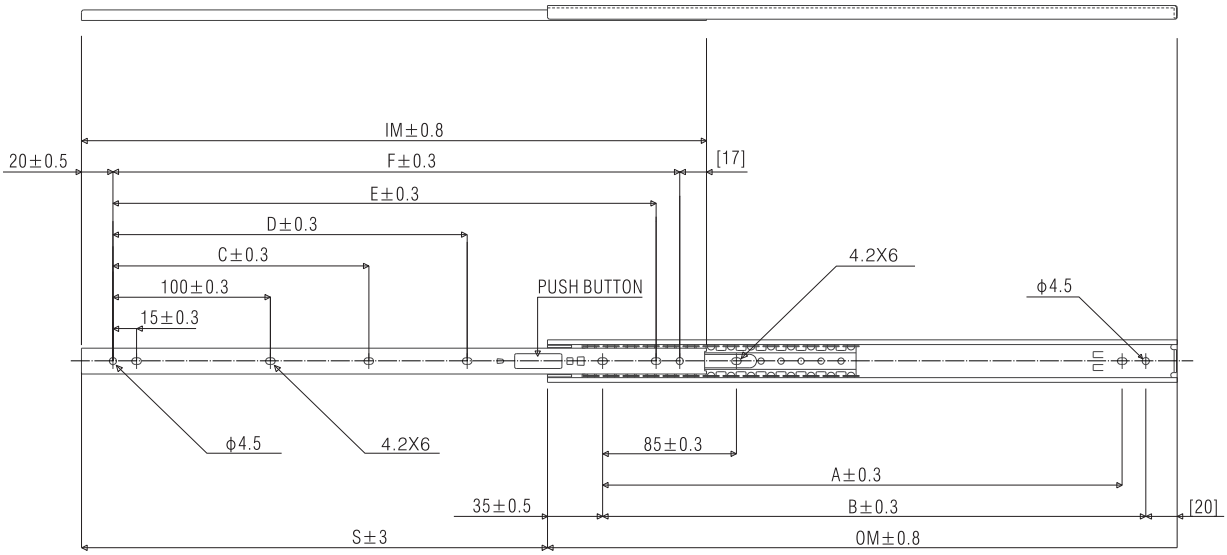

OM:Outer Member IM:Inner Member S:Stroke

ITEM	OM mm	IM mm	S mm	A mm	B mm	C mm	D mm	E mm	F mm			
30	300	297	221	230.0	245.0	150.0	---	---	---			
35	350	347	259	280.0	295.0	190.0	---	---	310.0			
40	400	397	296	330.0	345.0	225.0	---	345.0	360.0			
45	450	447	333	380.0	395.0	225.0	---	395.0	410.0			
50	500	497	371	430.0	445.0	225.0	---	445.0	460.0			
55	550	547	408	480.0	495.0	225.0	337.0	495.0	510.0			

Single | Full | Over | Two-way | Lock | Self close | In/out | Bumper | Stopper



- Material : SPCC
- Finished : Zinc plated
- T : 19.1mm ± 0.5
- W :27.0mm ±0.3
- Load :30～40kg/set
- Type : Full extension slide
- Standard : 200mm ～500mm

1.使用材料
a)Outer Member(1.4t),Inner Member(1.4t):SPCC
b)Retainer(0.5t):SECC(電気亜鉛鍍金鋼板)
2.表面処理
a)Zinc galvanizing(Cr3)
3.潤滑油`
a)JX日鉱日石(JX Nippon Oil &Energy) EPNOC AP

RoHs 対応品

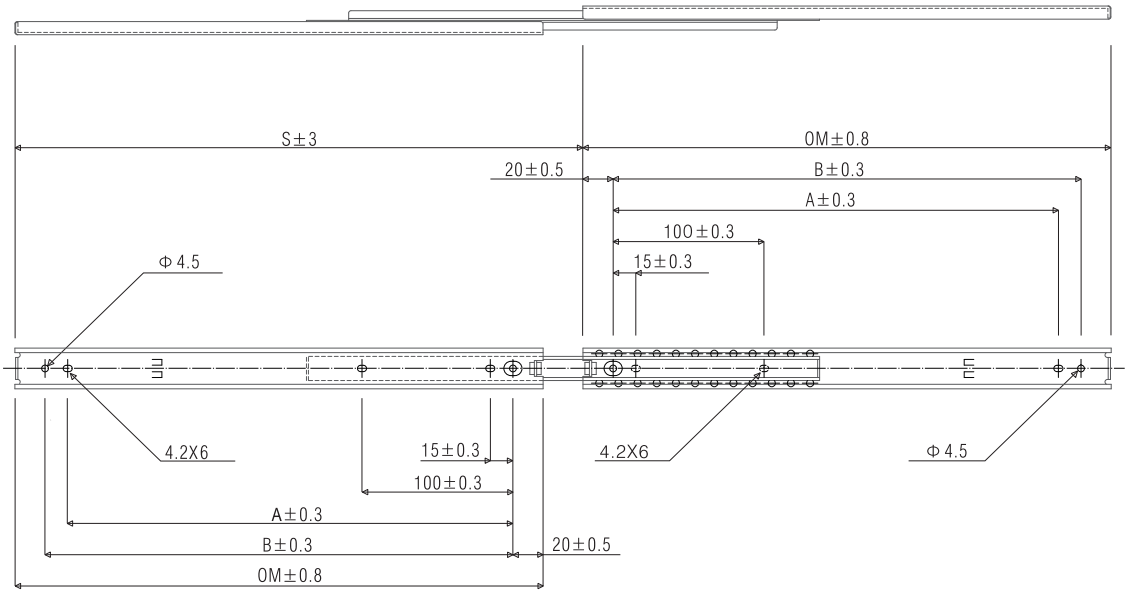

OM:Outer Member IM:Inner Member S:Stroke

ITEM	OM mm	S mm	A mm	B mm								
20	200	229.0	145.0	160.0								
25	250	278.0	195.0	210.0								
30	300	327.0	245.0	260.0								
35	350	376.0	295.0	310.0								
40	400	426.0	345.0	360.0								
45	450	475.0	395.0	410.0								
50	500	524.0	445.0	460.0								

3501 / 35mm slides

ILTOP

Single | Full | Over | Two-way | Lock | Self close | In/out | Bumper | Stopper

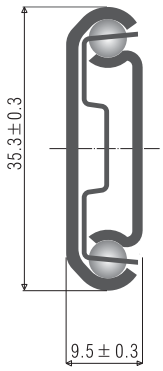

- Material : SPCC
- Finished : Zinc plated
- T : 9.5 mm± 0.3
- W :35.3mm ±0.3
- Load :25～35kg/set
- Type : Single extension slide
- Standard : 12" ～20"

1.使用材料
a)Outer Member(1.45t),Inner Member(1.5t):SPCC
b)Retainer(0.6t):SECC(電気亜鉛鍍金鋼板)
2.表面処理
a)Zinc galvanizing(Cr3)
3.潤滑油`
a)JX日鉱日石(JX Nippon Oil &Energy) EPNOC AP

RoHs 対応品

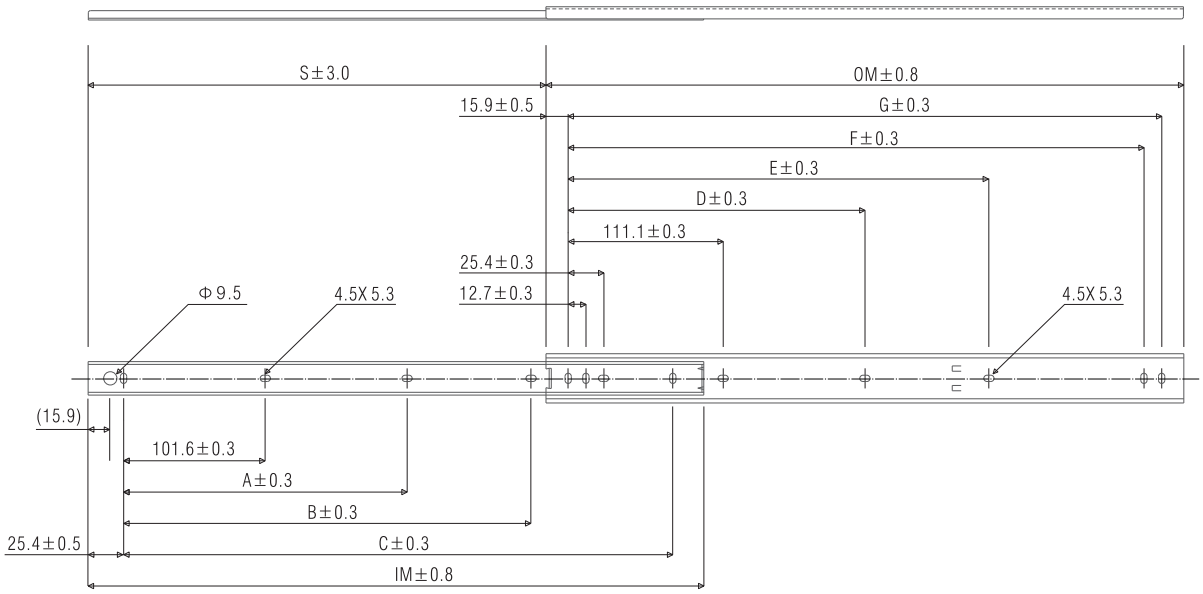

OM:Outer Member IM:Inner Member S:Stroke

ITEM	OM mm	IM mm	S mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm		
12	304.8	301.8	227	---	152.4	254.0	---	149.2	260.3	273.0		
14	355.6	352.6	277	---	203.2	304.8	---	200.0	311.1	323.8		
16	406.4	403.4	303	---	254.0	355.6	---	250.8	361.9	374.6		
18	457.2	454.2	328	203.2	304.8	406.4	212.7	301.6	412.7	425.4		
20	508.0	505.0	379	228.6	355.6	457.2	238.1	352.4	463.5	476.2		

Single | Full | Over | Two-way | Lock | Self close | In/out | Bumper | Stopper

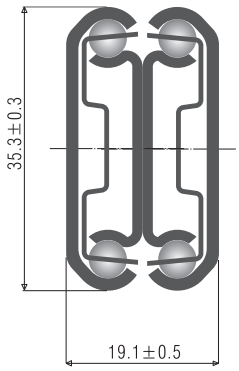

- Material : SPCC
- Finished : Zinc plated
- T : 19.1mm ± 0.5
- W :35.3mm ±0.3
- Load :45～55kg/set
- Type : Full extension slide
- Standard : 12" ～22"

RoHs 対応品

1.使用材料
a)Outer Member(1.45t),Inner Member(1.5t):SPCC
b)Retainer(0.6t):SECC(電気亜鉛鍍金鋼板)
2.表面処理
a)Zinc galvanizing(Cr3)
3.潤滑油`
a)JX日鉱日石(JX Nippon Oil &Energy) EPNOC AP

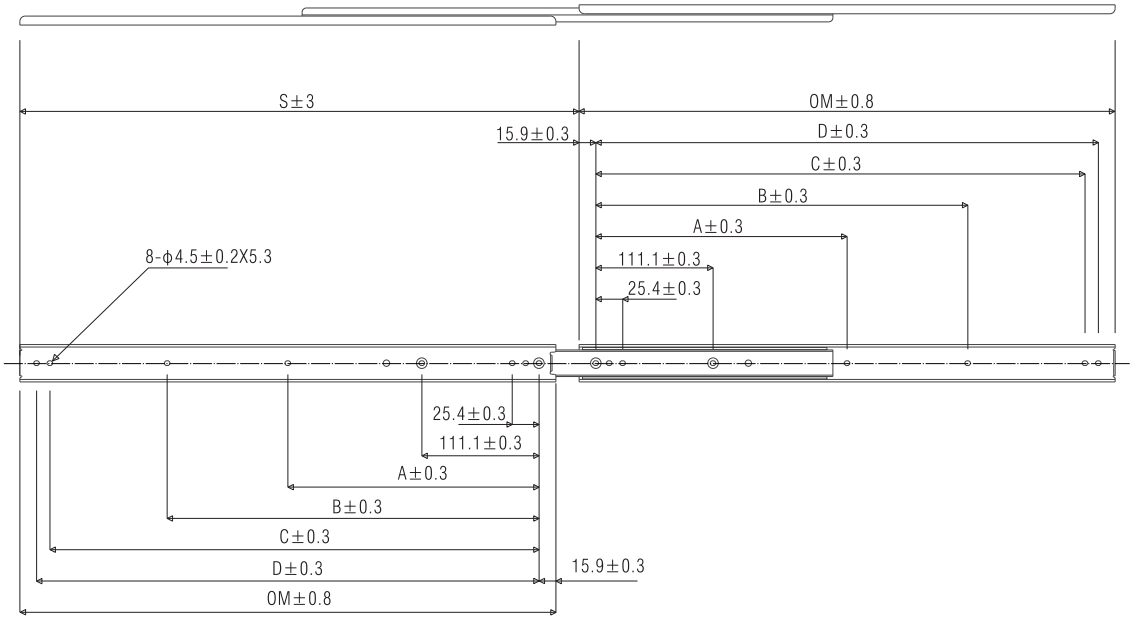

OM:Outer Member IM:Inner Member S:Stroke

ITEM	OM mm	S mm	A mm	B mm	C mm	D mm						
12	304.8	327.2	---	149.2	260.4	273.1						
14	355.6	378.0	---	200.0	311.2	323.9						
16	406.4	428.8	---	250.8	362.0	374.7						
18	457.2	479.6	212.7	301.6	412.8	425.5						
20	508.0	530.4	238.1	352.4	463.6	476.3						
22	588.8	581.2	263.5	403.2	514.4	527.1						

Single | Full | Over | Two-way | Lock | Self close | In/out | Bumper | Stopper

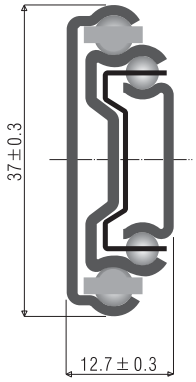

- Material : SPCC
- Finished : Zinc plated
- T : 12.7mm ± 0.3
- W :37.0mm ±0.3
- Load :30～40kg/set
- Type : Full extension slide
- Standard : 250～550mm

1.使用材料
a)Outer Member(1.2t),Center Member(1.35t),Inner Member(1.2t):SPCC
b)Retainer(0.6t):SECC(電気亜鉛鍍金鋼板)
2.表面処理
a)Zinc galvanizing(Cr3)
3.潤滑油`
a)JX日鉱日石(JX Nippon Oil &Energy) EPNOC AP

RoHs 対応品

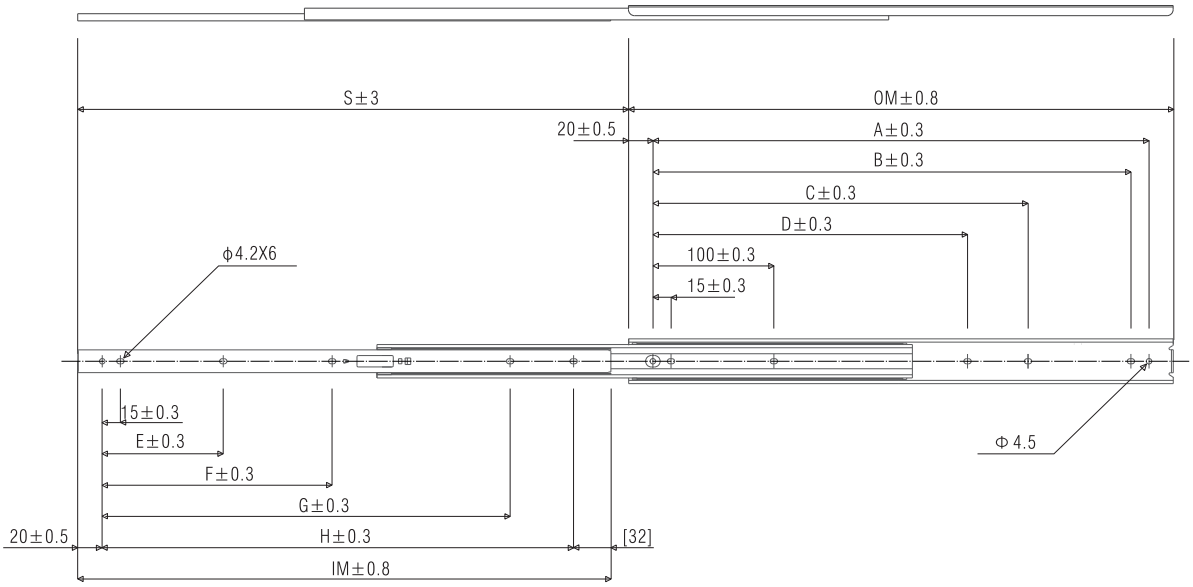

OM:Outer Member IM:Inner Member S:Stroke

ITEM	OM mm	IM mm	S mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm	G mm	
25	250	241.5	255	210.0	195.0	---	---	70.0	---	---	189.5	
30	300	291.5	305	260.0	245.0	160.0	---	70.0	120.0	---	239.5	
35	350	341.5	355	310.0	295.0	210.0	---	100.0	150.0	---	289.5	
40	400	391.5	405	360.0	345.0	260.0	210.0	100.0	150.0	300.0	339.5	
45	450	441.5	455	410.0	395.0	310.0	260.0	100.0	190.0	337.0	389.5	
50	500	491.5	505	460.0	445.0	360.0	310.0	100.0	190.0	337.0	439.5	
55	550	541.5	555	510.0	495.0	410.0	360.0	100.0	225.0	389.5	489.5	

Single | Full | Over | Two-way | Lock | Self close | In/out | BUM Bumper | STOP Stopper

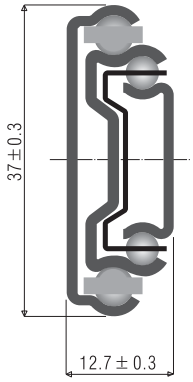

- Material : SPCC
- Finished : Zinc plated
- T : 12.7mm ± 0.3
- W :37.0mm ±0.3
- Load :30～40kg/set
- Type : Full extension slide
- Standard : 200mm ～550mm

RoHs 対応品

1.使用材料
a)Outer Member(1.2t),Center Member(1.35t),Inner Member(1.2t):SPCC
b)Retainer(0.6t):SECC(電気亜鉛鍍金鋼板)
2.表面処理
a)Zinc galvanizing(Cr3)
3.潤滑油`
a)JX日鉱日石(JX Nippon Oil &Energy) EPNOC AP

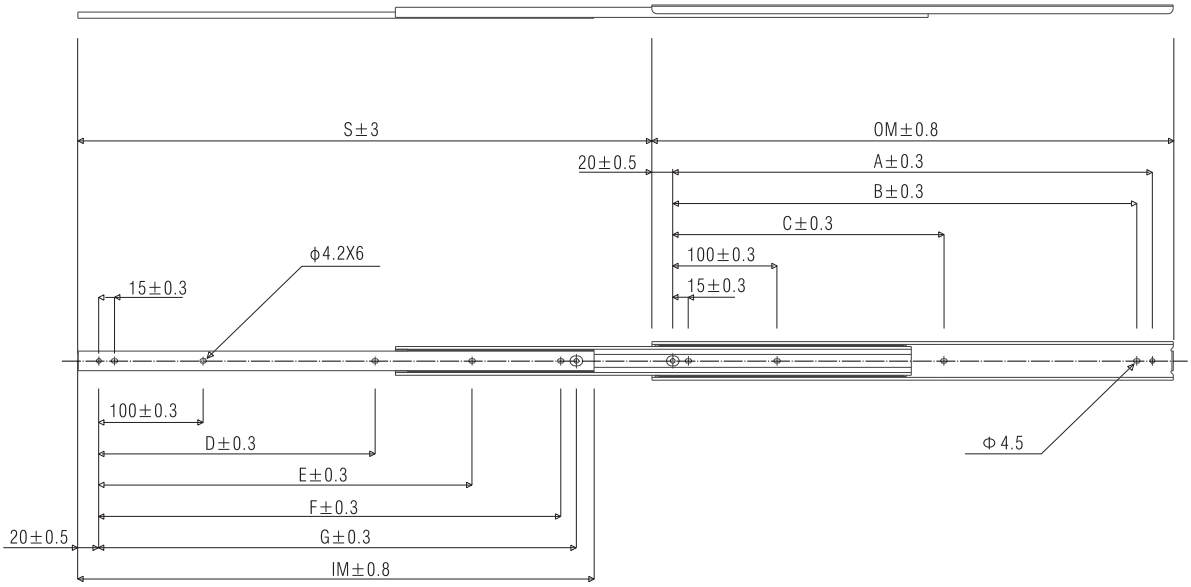

OM:Outer Member IM:Inner Member S:Stroke

ITEM	OM mm	IM mm	S mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm		
20	200	195.0	211	160.0	145.0	---	---	---	143.0	158.0		
25	250	245.0	273	210.0	195.0	---	---	---	193.0	208.0		
30	300	295.0	314	260.0	245.0	---	150.0	---	243.0	258.0		
35	350	345.0	373	310.0	295.0	---	190.0	---	293.0	308.0		
40	400	395.0	425	360.0	345.0	260.0	190.0	265.0	343.0	358.0		
45	450	445.0	475	410.0	395.0	260.0	225.0	300.0	393.0	408.0		
50	500	495.0	525	460.0	445.0	310.0	225.0	337.0	443.0	458.0		
55	550	545.0	575	510.0	495.0	360.0	225.0	337.0	493.0	508.0		

Single | Full | Over | Two-way | Lock | Self close | In/out | Bumper | Stopper

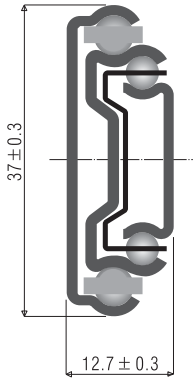

- Material : SPCC
- Finished : Zinc plated
- T : 12.7mm ± 0.3
- W :37.0mm ±0.3
- Load :30～40kg/set
- Type : Full extension slide
- Standard : 250～550mm

1.使用材料
a)Outer Member(1.2t),Center Member(1.35t),Inner Member(1.2t):SPCC
b)Retainer(0.6t):SECC(電気亜鉛鍍金鋼板)
2.表面処理
a)Zinc galvanizing(Cr3)
3.潤滑油`
a)JX日鉱日石(JX Nippon Oil &Energy) EPNOC AP

RoHs 対応品

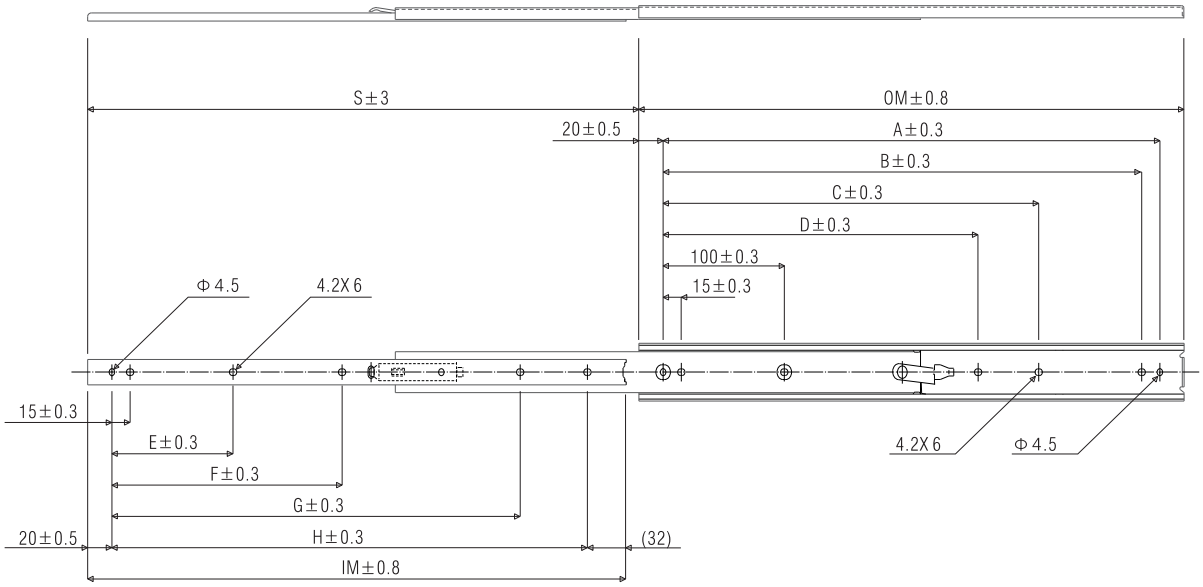

OM:Outer Member IM:Inner Member S:Stroke

ITEM	OM mm	IM mm	S mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	
25	250	244.5	250	210.0	195.0	-	-	70.0	-	-	192.5	
30	300	294.5	302	260.0	245.0	-	-	70.0	120.0	-	242.5	
35	350	344.5	355	310.0	295.0	210.0	-	100.0	150.0	-	292.5	
40	400	394.5	405	360.0	345.0	260.0	-	100.0	150.0	300.0	342.5	
45	450	444.5	455	410.0	395.0	310.0	260.0	100.0	190.0	337.0	392.5	
50	500	494.5	505	460.0	445.0	360.0	310.0	100.0	190.0	337.0	442.5	
55	550	544.5	555	510.0	495.0	410.0	360.0	100.0	225.0	389.5	492.5	

5100 / 51mm slides

ILTOP

Single | Full | Over | Two-way | Lock | Self close | In/out | BUM Bumper | STOP Stopper

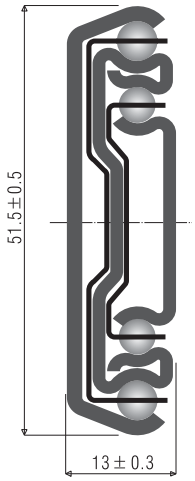

- Material : SPCC
- Finished : Zinc plated
- T : 13.0mm ± 0.3
- W :51.5mm ±0.5
- Load :70～100kg/set
- Type : Full extension slide
- Standard : 12" ～20"

RoHs 対応品

1.使用材料
a)Outer Member(1.8t),Center Member(1.6t),Inner Member(1.6t):SPCC
b)Retainer(0.5t):SECC(電気亜鉛鍍金鋼板)
2.表面処理
a)Zinc galvanizing(Cr3)
3.潤滑油`
a)JX日鉱日石(JX Nippon Oil &Energy) EPNOC AP

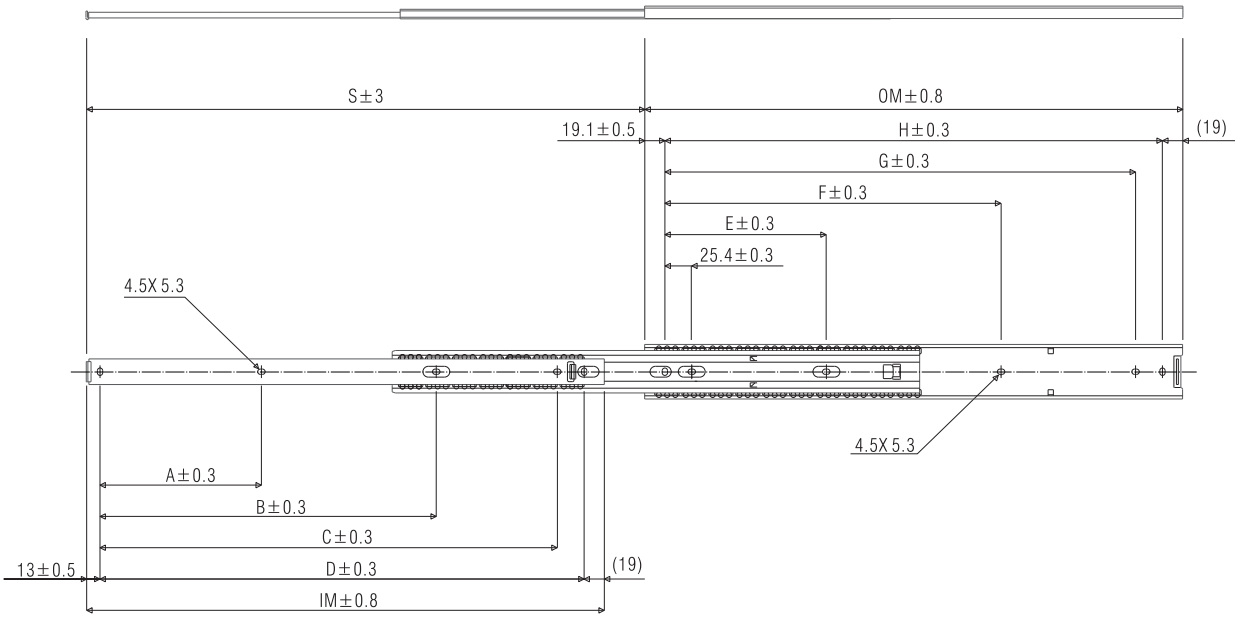

OM:Outer Member IM:Inner Member S:Stroke

ITEM	OM mm	IM mm	S mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	
12	304.8	285.8	330	76.2	177.8	228.6	254.0	88.9	177.8	241.3	266.7	
14	355.6	336.6	381	101.6	215.9	279.4	304.8	101.6	215.9	292.1	317.5	
16	406.4	387.4	432	114.3	241.3	330.2	355.6	127.0	241.3	342.9	368.3	
18	457.2	438.2	483	139.7	279.4	381.0	406.4	139.7	279.4	393.7	419.1	
20	508.0	489.0	533	152.4	317.5	431.0	457.2	152.4	317.5	444.5	469.9	

5101 / 51mm slides

ILTOP

Single | Full | Over | Two-way | Lock | Self close | In/out | BUM Bumper | STOP Stopper

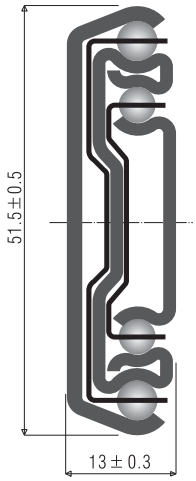

- Material : SPCC
- Finished : Zinc plated
- T : 13 mm ± 0.3
- W :51.5mm ±0.5
- Load :70~100kg/set
- Type : Full extension slide
- Standard : 12"~20"

1.使用材料
a)Outer Member(1.8t),Center Member(1.6t),Inner Member(1.8t):SPCC
b)Retainer(0.5t):SECC(電気亜鉛鍍金鋼板)
2.表面処理
a)Zinc galvanizing(Cr3)
3.潤滑油`
a)JX日鉱日石(JX Nippon Oil &Energy) EPNOC AP

RoHs 対応品

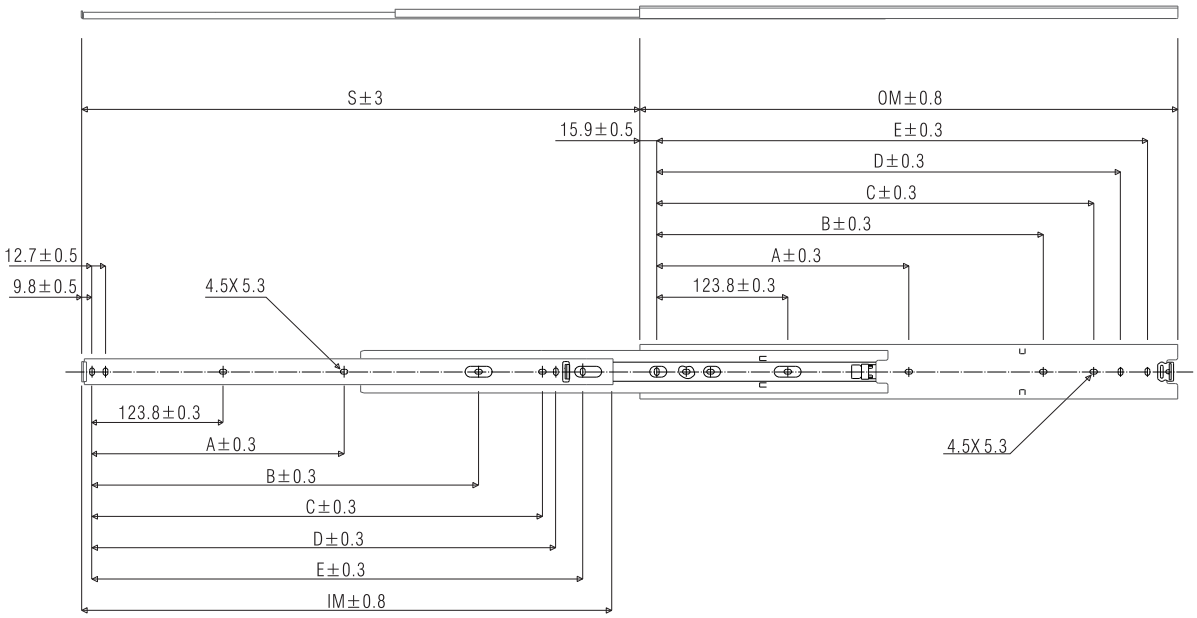

OM:Outer Member IM:Inner Member S:Stroke

ITEM	OM mm	IM mm	S mm	A mm	B mm	C mm	D mm	E mm	F mm			
12	304.8	298.8	330	---	161.9	222.2	234.9	260.3	209.5			
14	355.6	349.6	381	---	212.7	273.0	285.7	311.1	260.3			
16	406.4	400.4	432	---	263.5	323.8	236.5	361.9	311.1			
18	457.2	451.2	483	212.7	314.3	374.6	287.3	412.7	361.9			
20	508.0	502.2	533	238.1	365.1	425.4	438.1	463.5	412.7			

5103 / 51mm slides

ILTOP

Single | Full | Over | Two-way | Lock | Self close | In/out | BUM Bumper | STOP Stopper

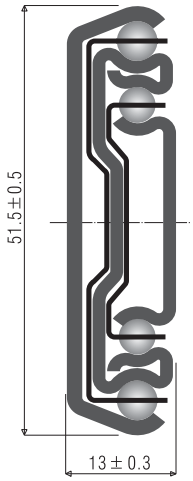

- Material : SPCC
- Finished : Zinc plated
- T : 13.0mm ± 0.3
- W :51.5mm ±0.5
- Load :70～100kg/set
- Type : Full extension slide
- Standard : 12" ～20"

RoHs 対応品

1.使用材料
a)Outer Member(1.8t),Center Member(1.6t),Inner Member(1.6t):SPCC
b)Retainer(0.5t):SECC(電気亜鉛鍍金鋼板)
2.表面処理
a)Zinc galvanizing(Cr3)
3.潤滑油`
a)JX日鉱日石(JX Nippon Oil &Energy) EPNOC AP

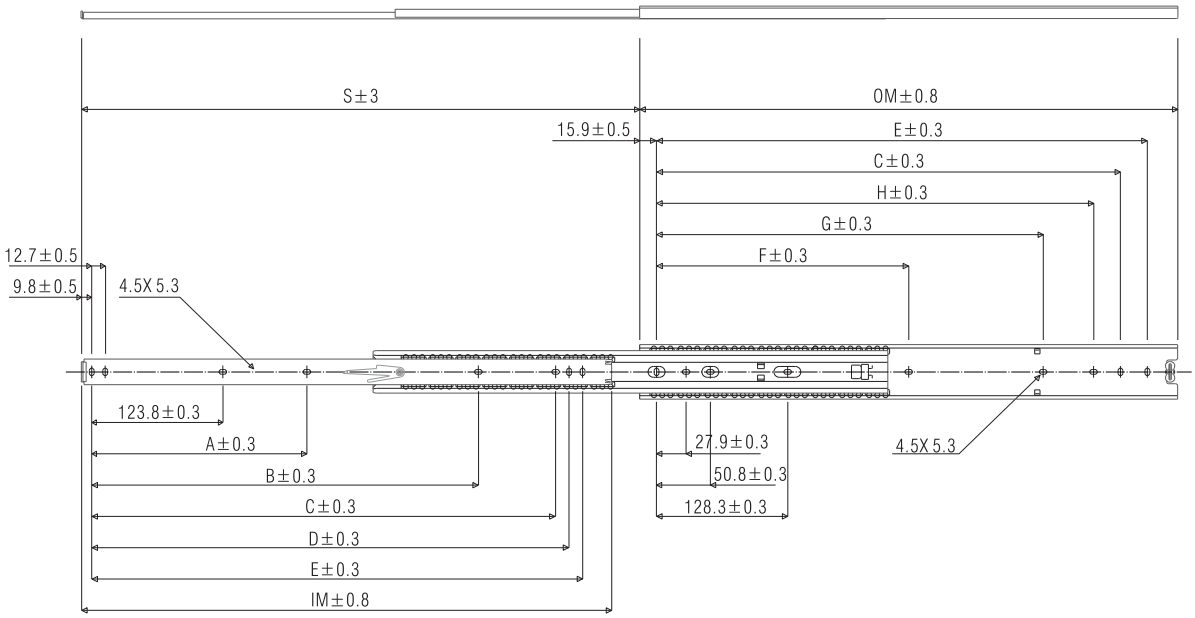

OM:Outer Member IM:Inner Member S:Stroke

ITEM	OM mm	IM mm	S mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	
12	304.8	285.8	330	---	---	234.9	247.6	260.3	---	161.9	209.5	
14	355.6	336.6	381	---	---	285.7	298.4	311.1	---	212.7	260.3	
16	406.4	387.4	432	---	---	336.5	349.2	361.9	---	263.5	311.1	
18	457.2	438.2	483	177.8	314.3	387.3	400.0	412.7	212.7	314.3	361.9	
20	508.0	489.0	533	203.2	365.1	468.1	450.8	463.5	238.1	365.1	412.7	

Single | Full | Over | Two-way | Lock | Self close | In/out | Bumper | Stopper

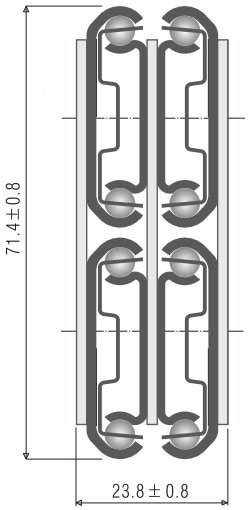

- Material : SPCC
- Finished : Zinc plated
- T : 23.0 mm ± 0.8
- W :71.4mm ±0.8
- Load :150~250kg/set
- Type : Full extension slide
- Standard : 12"~20"

1.使用材料
a)Outer Member(1.45t),Inner Member(1.5t):SPCC
b)Retainer(0.6t):SECC(電気亜鉛鍍金鋼板)
2.表面処理
a)Zinc galvanizing(Cr3)
3.潤滑油`
a)JX日鉱日石(JX Nippon Oil &Energy) EPNOC AP

RoHs 対応品

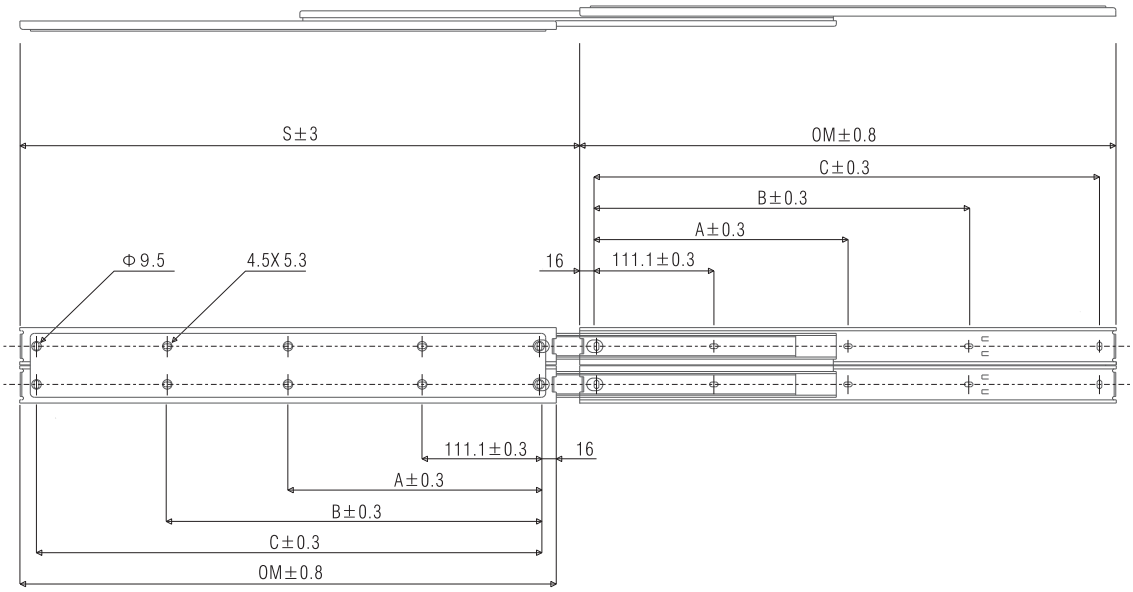

OM:Outer Member IM:Inner Member S:Stroke

ITEM	ML mm	S mm	A mm	B mm	C mm							
12	304.8	327	---	149.2	273.0							
14	355.6	378	---	200.0	323.8							
16	406.4	429	---	250.8	374.6							
18	457.2	479	212.7	301.6	425.4							
20	508.0	530	238.1	352.4	476.2							

7102 / 71mm slides

ILTOP

Single | Full | Over | Two-way | Lock | Self close | In/out | Bumper | Stopper

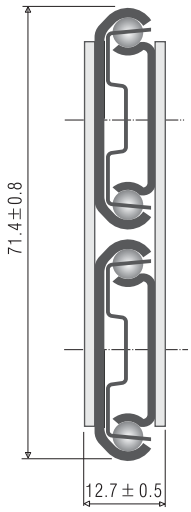

- Material : SPCC
- Finished : Zinc plated
- T : 12.7mm ± 0.5
- W :71.4mm ±0.8
- Load :70～100kg/set
- Type : Single extension slide
- Standard : 12" ～20"

RoHs 対応品

1.使用材料
a)Outer Member(1.45t),Inner Member(1.5t):SPCC
b)Retainer(0.6t):SECC(電気亜鉛鍍金鋼板)
2.表面処理
a)Zinc galvanizing(Cr3)
3.潤滑油`
a)JX日鉱日石(JX Nippon Oil &Energy) EPNOC AP

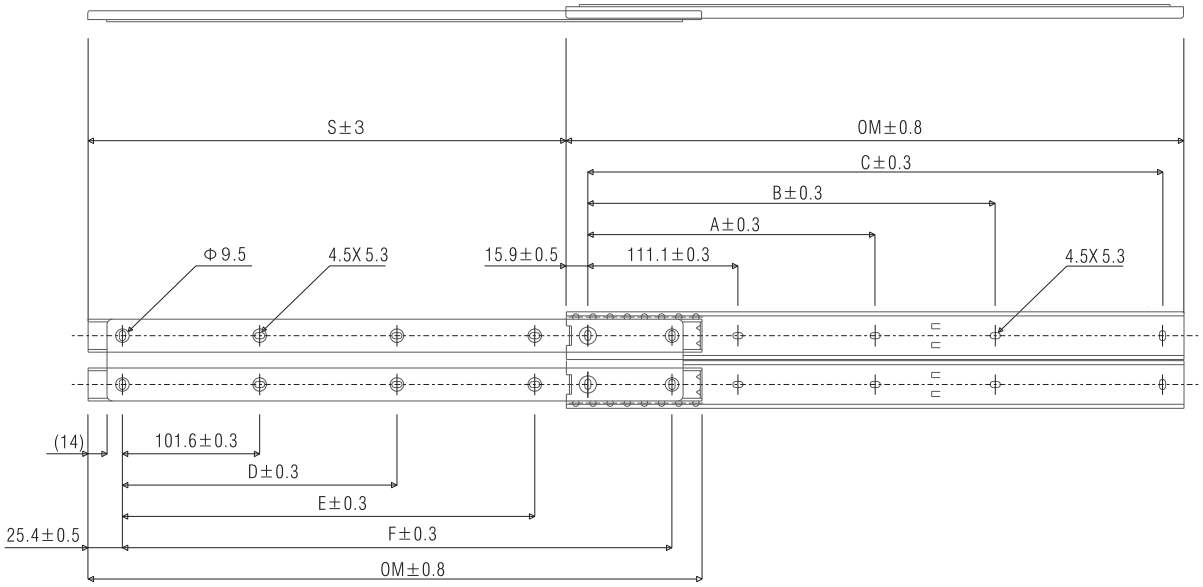

OM:Outer Member IM:Inner Member S:Stroke

ITEM	ML mm	S mm	A mm	B mm	C mm	D mm	E mm	F mm				
12	304.8	227.0	---	149.2	273.0	---	152.8	254.4				
14	355.6	278.0	---	200.0	323.8	---	203.6	305.2				
16	406.4	303.0	---	250.8	374.6	---	254.4	356.0				
18	457.2	354.0	212.7	301.6	425.4	203.2	305.2	406.8				
20	508.0	367.0	238.1	352.4	476.2	228.6	356.0	457.6				

2710 / 27mm slides

ILTOP

Single Full Over Two-way Lock

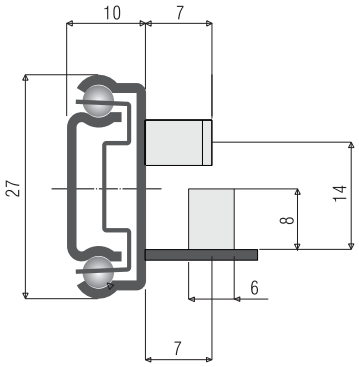



- Material : SPCC
- Finished : Zinc plated
- T : 10.0mm ± 0.3
- W :27.0mm ±0.3
- Load :15～20kg/set
- Type : Singlel extension slide
- Standard : 250～550mm

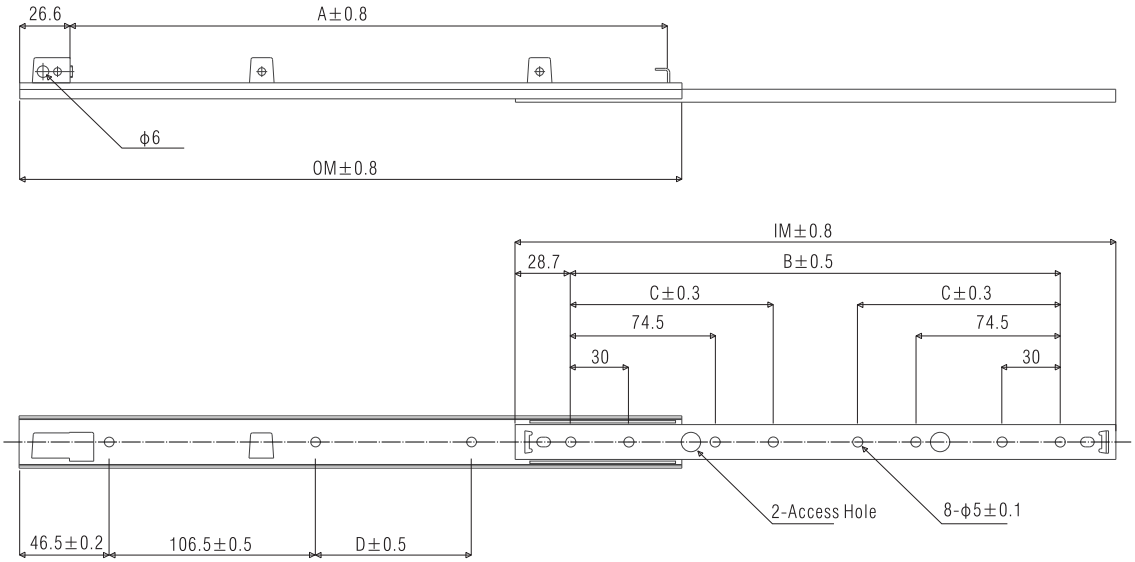

OM:Outer Member IM:Inner Member S:Stroke

ITEM	DRAWER LENGTH	OM mm	IM mm	A mm	B mm	C mm	D mm					
261	260-350	261	246	227	188.6	-	-					
286	280-400	286	254	252	196.6	-	24.5					
317	320-450	317	278	283	220.6	104.5	55.5					
342	340-500	342	310	310	252.6	104.5	80.5					
367	370-550	367	342	333	284.6	104.5	105.5					

2711 / 27mm slides

ILTOP





- Material : SPCC
- Finished : Zinc plated
- T : 10.0mm ± 0.3
- W :27.0mm ±0.3
- Load :15~20kg/set
- Type : Single extension slide
- Standard : 250mm ~500mm

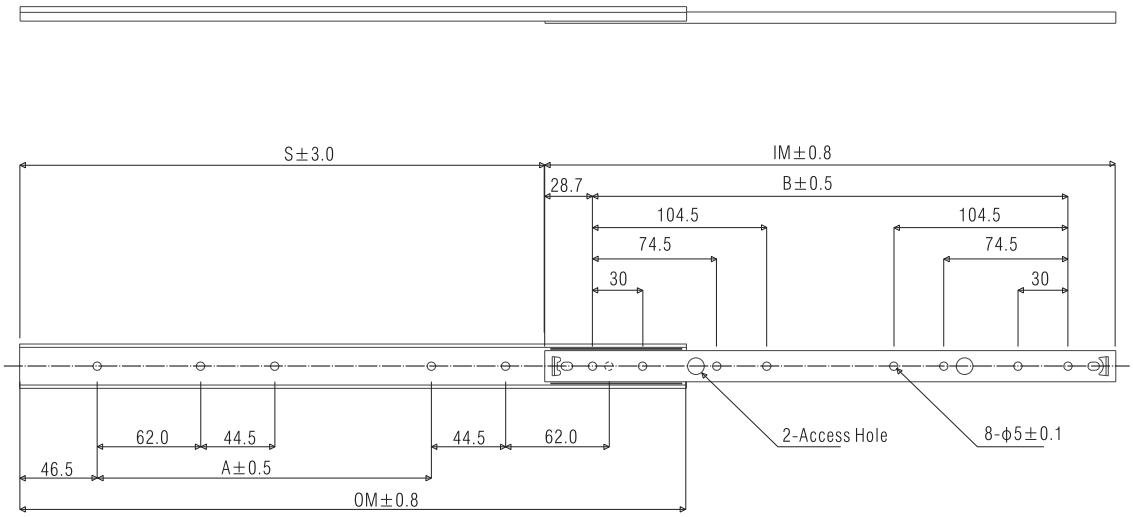

OM:Outer Member IM:Inner Member S:Stroke

ITEM	DRAWER LENGTH	S mm	OM mm	IM mm	A mm	B mm						
300	300	216	300	242.6	-	185.2						
350	350	266	350	292.6	150.5	235.2						
400	400	316	400	342.6	195.5	285.2						
450	450	366	450	392.6	245.5	335.2						
500	500	416	500	442.6	295.5	385.2						

2710 / 27mm slides

ILTOP

Single Full Over Two-way Lock

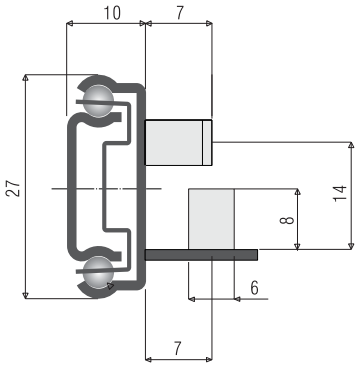



- Material : SPCC
- Finished : Zinc plated
- T : 10.0mm ± 0.3
- W :27.0mm ±0.3
- Load :15～20kg/set
- Type : Singlel extension slide
- Standard : 250～550mm

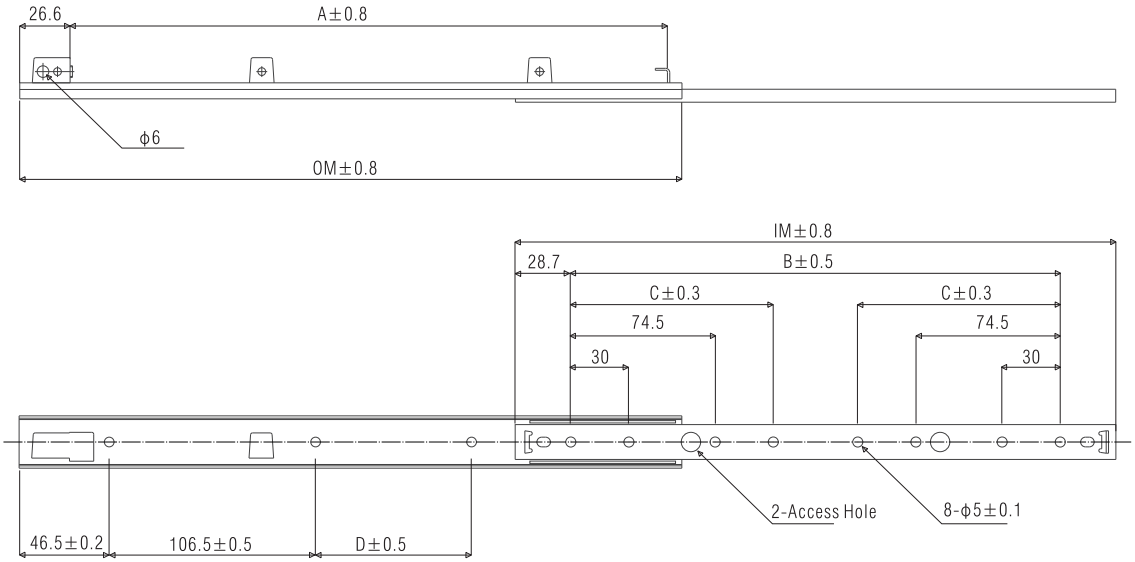

OM:Outer Member IM:Inner Member S:Stroke

ITEM	DRAWER LENGTH	OM mm	IM mm	A mm	B mm	C mm	D mm					
261	260-350	261	246	227	188.6	-	-					
286	280-400	286	254	252	196.6	-	24.5					
317	320-450	317	278	283	220.6	104.5	55.5					
342	340-500	342	310	310	252.6	104.5	80.5					
367	370-550	367	342	333	284.6	104.5	105.5					

2711 / 27mm slides

ILTOP





- Material : SPCC
- Finished : Zinc plated
- T : 10.0mm ± 0.3
- W :27.0mm ±0.3
- Load :15~20kg/set
- Type : Single extension slide
- Standard : 250mm ~500mm

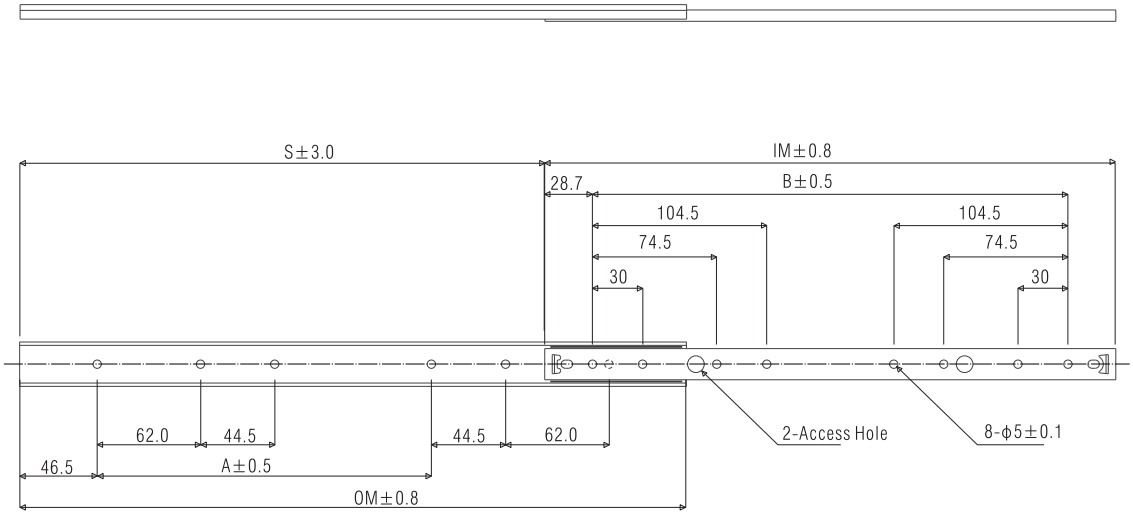

OM:Outer Member IM:Inner Member S:Stroke

ITEM	DRAWER LENGTH	S mm	OM mm	IM mm	A mm	B mm						
300	300	216	300	242.6	-	185.2						
350	350	266	350	292.6	150.5	235.2						
400	400	316	400	342.6	195.5	285.2						
450	450	366	450	392.6	245.5	335.2						
500	500	416	500	442.6	295.5	385.2						

2713 / 27mm slides

ILTOP

Single | Full | Over | Two-way | Lock | Self close | In/out | Bumper | Stopper





- Material : SPCC
- Finished : Zinc plated
- T : 10.0mm ± 0.3
- W :27.0mm ±0.3
- Load :15~20kg/set
- Type : Single extension slide
- Standard : 250mm ~500mm

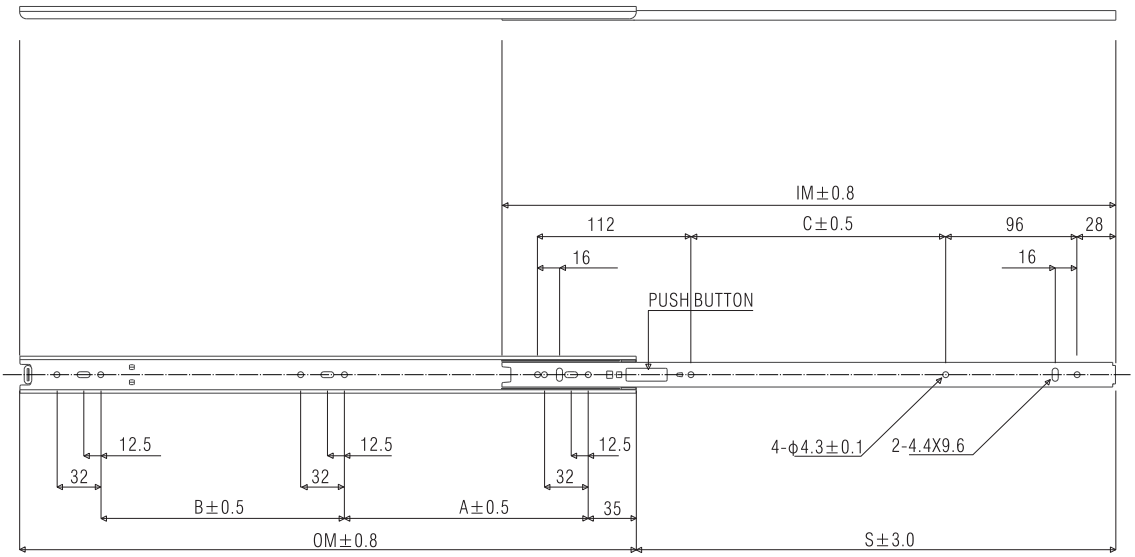

OM:Outer Member IM:Inner Member S:Stroke

ITEM	DRAWER LENGTH	S mm	OM mm	IM mm	A mm	B mm	C mm					
300	300	200	300	298	103.0	103.0	36.0					
350	350	250	350	348	128.0	128.0	86.0					
400	400	300	400	398	153.0	153.0	136.0					
450	450	350	450	448	178.0	178.0	186.0					
500	500	400	500	498	203.0	203.0	236.0					

2715 / 27mm slides

ILTOP

Single | Full | Over | Two-way | Lock | Self close | In/out | Bumper | Stopper





- Material : SPCC
- Finished : Zinc plated
- T : 10.0mm ± 0.3
- W :27.0mm ±0.3
- Load :15~20kg/set
- Type : Single extension slide
- Standard : 250mm ~500mm

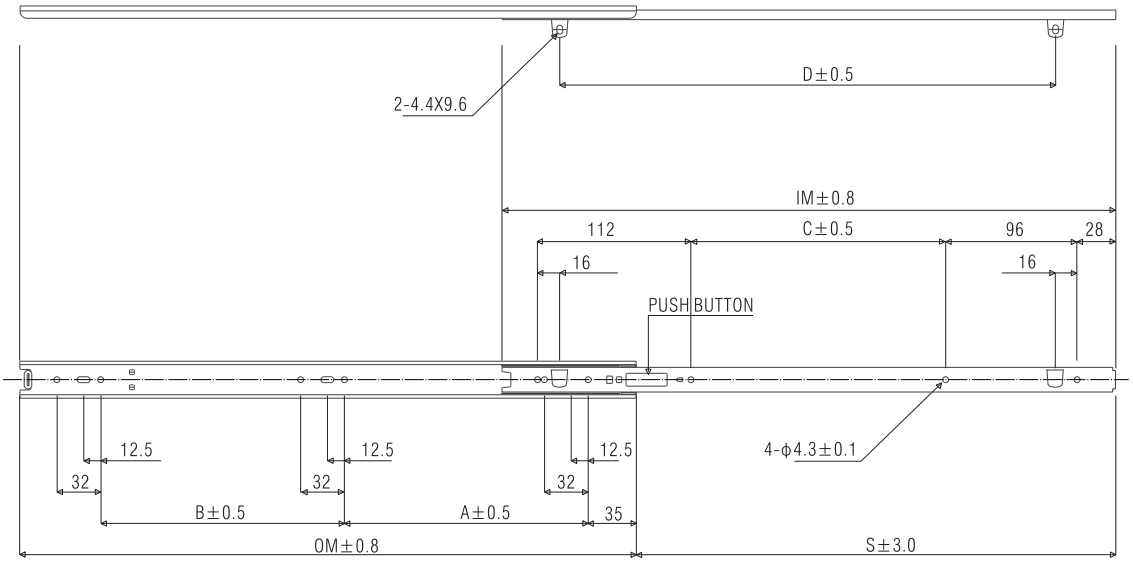

OM:Outer Member IM:Inner Member S:Stroke

ITEM	DRAWER LENGTH	S mm	OM mm	IM mm	A mm	B mm	C mm	D mm				
300	300	200	300	298	103.0	103.0	36.0	212.0				
350	350	250	350	348	128.0	128.0	86.0	262.0				
400	400	300	400	398	153.0	153.0	136.0	312.0				
450	450	350	450	448	178.0	178.0	186.0	362.0				
500	500	400	500	498	203.0	203.0	236.0	412.0				

2721 / 27mm slides

ILTOP

Single | Full | Over | Two-way | Lock | Self close | In/out | BUM Bumper | STOP Stopper





- Material : SPCC
- Finished : Zinc plated
- T : 12.7mm ± 0.3
- W :27.0mm ±0.3
- Load :15~20kg/set
- Type : Single extension slide
- Standard : 250mm ~500mm

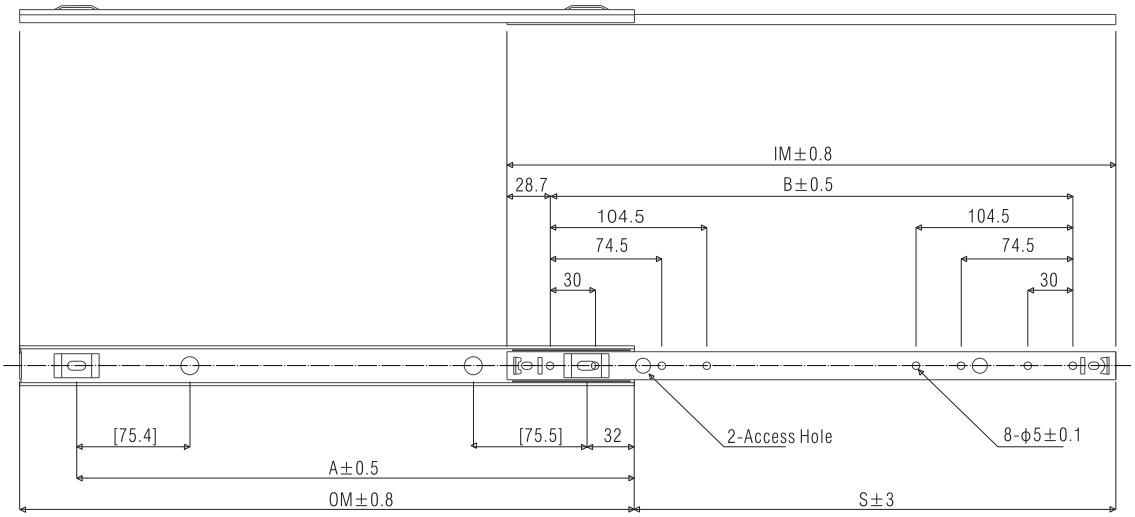

OM:Outer Member IM:Inner Member S:Stroke

ITEM	DRAWER LENGTH	S mm	OM mm	IM mm	A mm	B mm						
300	300	220	310	306	272.0	248.6						
350	350	270	360	356	322.0	298.6						
400	400	320	410	406	372.0	348.6						
450	450	370	460	456	422.0	398.6						
500	500	420	510	506	472.0	448.6						

3520 / 35mm slides

ILTOP

Single | Full | Over | Two-way | Lock | Self close | In/out | BUM Bumper | STOP Stopper

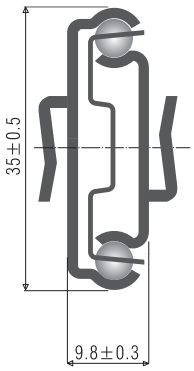



- Material : SPCC
- Finished : Zinc plated
- T : 9.8mm ± 0.3
- W :35.0mm ±0.5
- Load :20～30kg/set
- Type : Single extension slide
- Standard : 12" ～20"

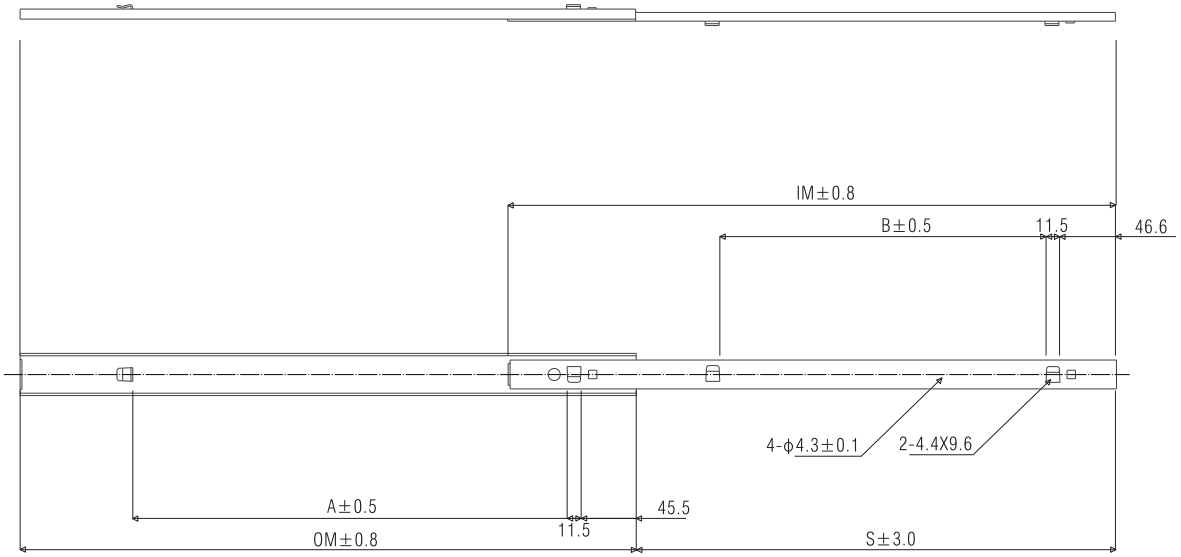

OM:Outer Member IM:Inner Member S:Stroke

ITEM	DRAWER LENGTH	S mm	OM mm	IM mm	A mm	B mm	W					
12	300	207.0	304.8	298.4	159.6	119.0						
14	350	243.6	355.6	349.2	209.6	169.0						
16	400	294.4	406.4	400.0	259.6	219.0						
18	450	345.2	457.2	450.8	309.6	269.0						
20	500	396.0	508.0	501.6	359.6	269.0						
22	550	446.8	558.8	552.4	359.6	269.0						

3521 / 35mm slides

ILTOP

Single | Full | Over | Two-way | Lock | Self close | In/out | BUM Bumper | STOP Stopper

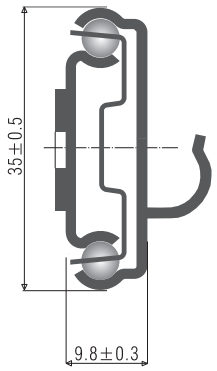



- Material : SPCC
- Finished : Zinc plated
- T : 9.8mm ± 0.3
- W :35.0mm ±0.5
- Load :20~30kg/set
- Type : Single extension slide
- Standard : 310mm~510mm

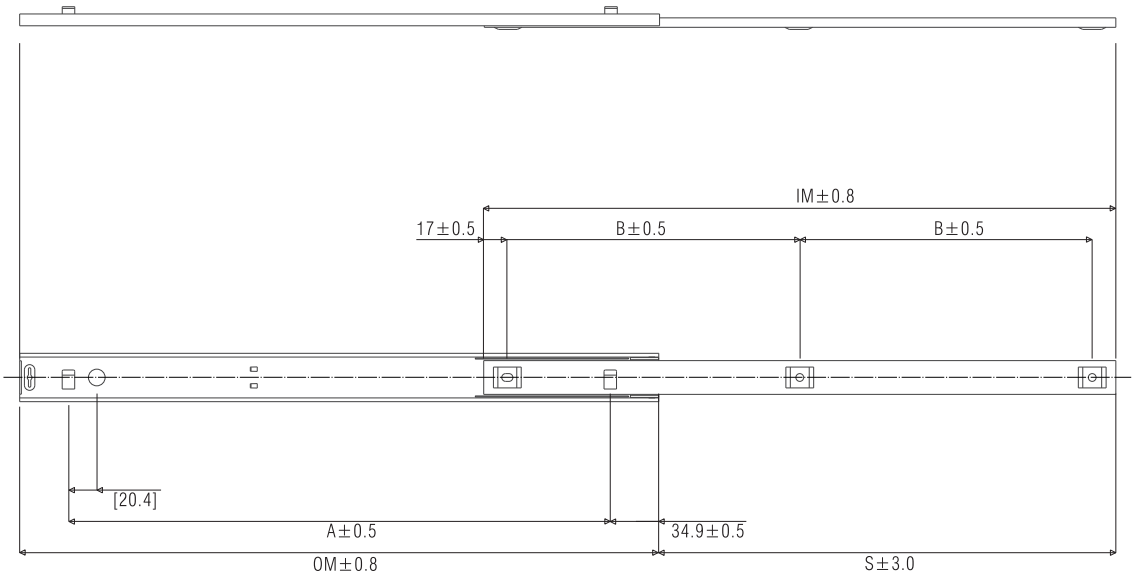

OM:Outer Member IM:Inner Member S:Stroke

ITEM	DRAWER LENGTH	S mm	OM mm	IM mm	A mm	B mm						
300	300	178.0	310.0	305.0	240.0	135.5						
350	350	228.6	360.0	355.0	290.0	160.5						
400	400	278.4	410.0	405.0	340.0	185.5						
450	450	328.2	460.0	455.0	390.0	210.5						
500	500	378.0	510.0	505.0	440.0	235.5						

3541 / 35mm slides

ILTOP

Single | Full | Over | Two-way | Lock | Self close | In/out | BUM Bumper | STOP Stopper

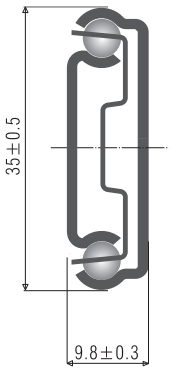



- Material : SPCC
- Finished : Zinc plated
- T : 9.8mm ± 0.3
- W :35.0mm ±0.5
- Load :20~30kg/set
- Type : Single extension slide
- Standard : 300mm ~550mm

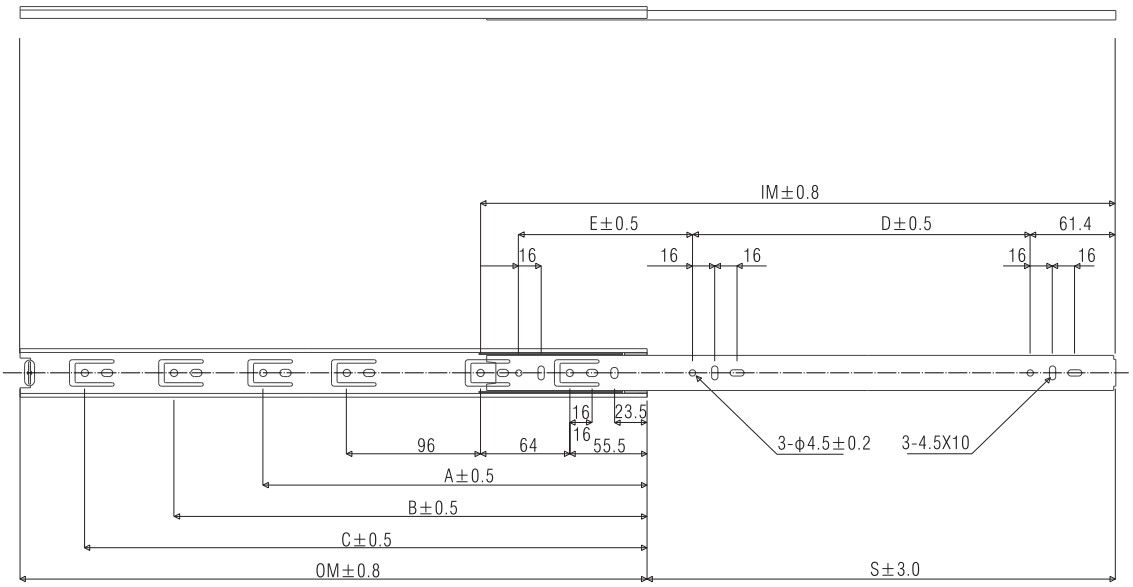

OM:Outer Member IM:Inner Member S:Stroke

ITEM	DRAWER LENGTH	S mm	OM mm	IM mm	A mm	B mm	C mm	D mm	E mm			
300	300	207.0	300.0	300.0	279.5	-	-	98.9	102.1			
350	350	243.6	350.0	350.0	311.5	-	-	148.9	102.1			
400	400	294.4	400.0	400.0	311.5	375.5	-	198.9	102.1			
450	450	345.2	450.0	450.0	343.5	407.5	-	248.9	102.1			
500	500	396.0	500.0	500.0	343.5	407.5	471.5	292.9	108.1			
550	550	446.8	550.0	550.0	375.5	439.5	503.5	342.9	108.1			

ILTOP

Single | Full | Over | Two-way | Lock | Self close | In/out | Bumper | Stopper

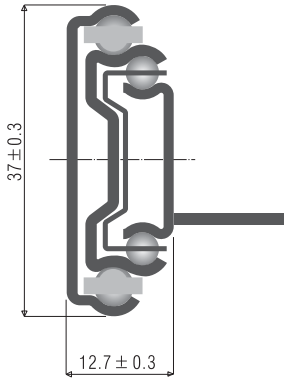



- Material : SPCC
- Finished : Zinc plated
- T : 12.7mm ± 0.3
- W :37.0mm ±0.3
- Load :30~40kg/set
- Type : Full extension slide
- Standard : 300mm~550mm

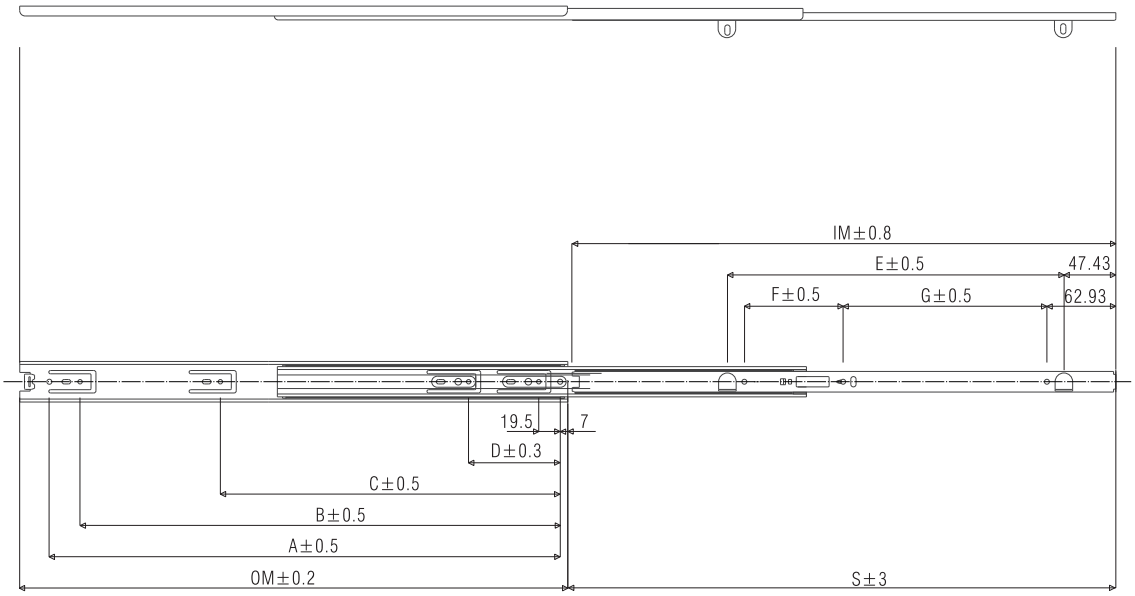

OM:Outer Member IM:Inner Member S:Stroke

ITEM	DRAWER LENGTH	S mm	OM mm	IM mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm	
300	300	300	300	296	273.0	253.0	-	157.0	207.0	218.1	57.9	
350	350	350	350	346	323.0	285.0	-	157.0	242.0	186.1	89.9	
400	400	400	400	395	373.0	317.0	-	157.0	277.0	154.1	121.9	
450	450	450	450	446	423.0	381.0	317.0	93.0	307.0	122.1	153.9	
500	500	500	500	496	473.0	445.0	317.0	93.0	307.0	90.1	185.9	
550	550	550	550	546	523.0	428.0	317.0	93.0	307.0	58.1	217.9	

3710 / 37mm slides

ILTOP

Single | Full | Over | Two-way | Lock | Self close | In/out | Bumper | Stopper

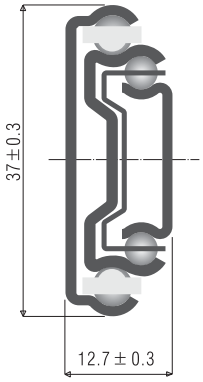



- Material : SPCC
- Finished : Zinc plated
- T : 12.7mm ± 0.3
- W :37.0mm ±0.3
- Load :30～40kg/set
- Type : Full extension slide
- Standard : 300mm ～550mm

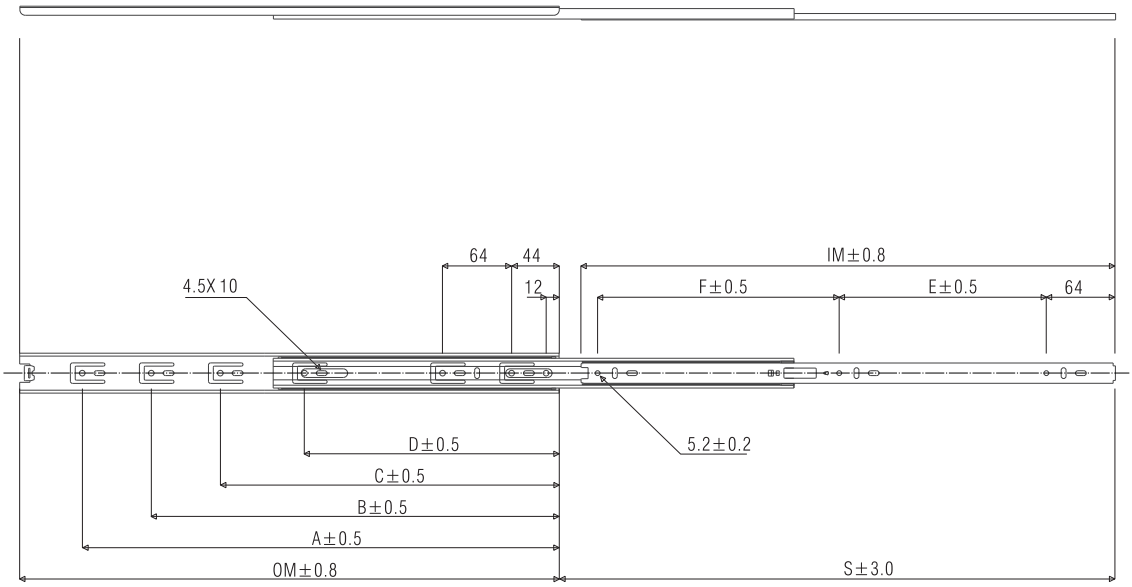

OM:Outer Member IM:Inner Member S:Stroke

ITEM	DRAWER LENGTH	S mm	OM mm	IM mm	A mm	B mm	C mm	D mm	E mm	F mm		
300	300	303	300	296	-	-	-	236.0	-	216.0		
350	350	353	350	346	-	-	300.0	236.0	96.0	170.0		
400	400	403	400	395	-	364.0	300.0	236.0	128.0	188.0		
450	450	453	450	446	-	364.0	300.0	236.0	160.0	206.0		
500	500	503	500	496	428.0	364.0	300.0	236.0	192.0	224.0		
550	550	553	550	546	492.0	428.0	364.0	236.0	224.0	242.0		

3731 / 37mm slides

ILTOP

Single | Full | Over | Two-way | Lock | Self close | In/out | Bumper | Stopper

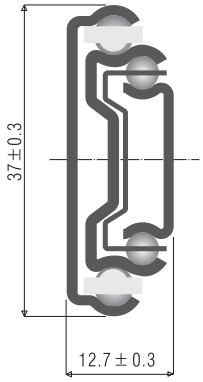



- Material : SPCC
- Finished : Zinc plated
- T : 12.7mm ± 0.3
- W :37.0mm ±0.3
- Load :30~40kg/set
- Type : Full extension slide
- Standard : 300mm~550mm
- Self Closing

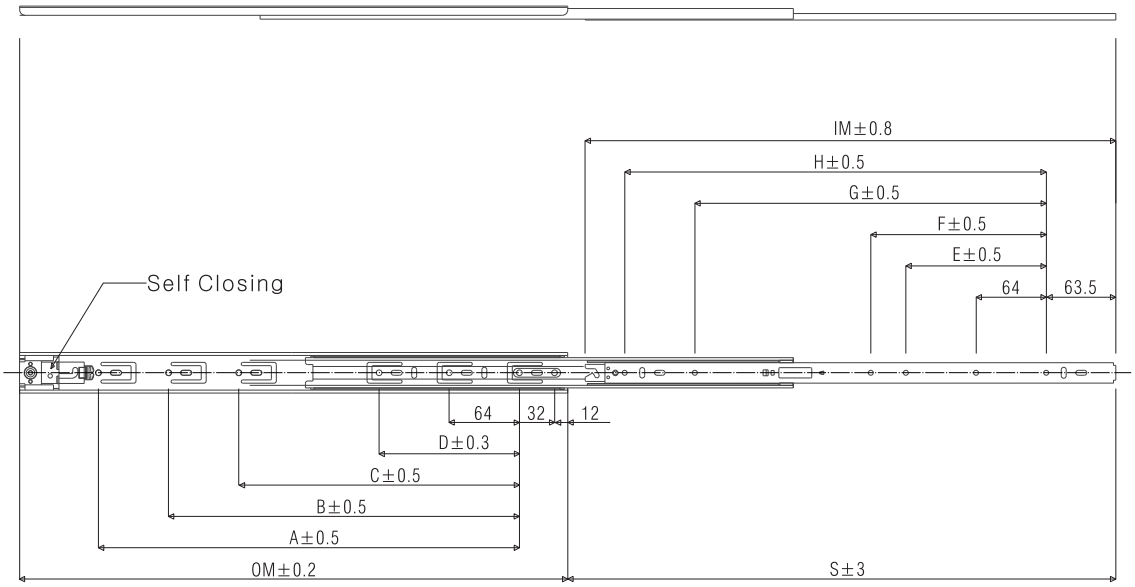

OM:Outer Member IM:Inner Member S:Stroke

ITEM	DRAWER LENGTH	S mm	OM mm	IM mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm
300	300	300	300	282	176.0	-	-	-	-	-	120.5	184.5
350	350	350	350	332	224.0	-	-	-	-	-	170.5	234.5
400	400	400	400	382	256.0	192.0	-	-	78.0	110.0	220.5	284.5
450	450	450	450	432	320.0	256.0	192.0	-	103.0	135.0	270.5	334.5
500	500	500	500	482	384.0	320.0	256.0	-	128.0	160.0	320.5	384.5
550	550	550	550	532	416.0	352.0	288.0	128.0	153.0	185.0	370.5	434.5

ILTOP

Single | Full | Over | Two-way | Lock | Self close | In/out | BUM Bumper | STOP Stopper

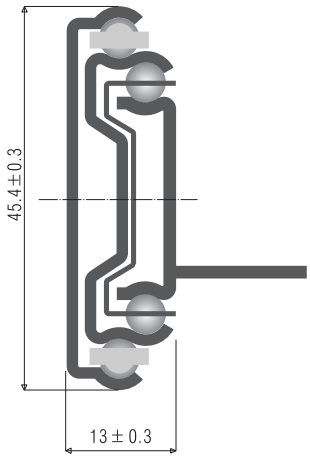



- Material : SPCC
- Finished : Zinc plated
- T : 13.0mm ± 0.3
- W :45.4mm ±0.3
- Load :40~50kg/set
- Type : Full extension slide
- Standard : 300mm ~550mm

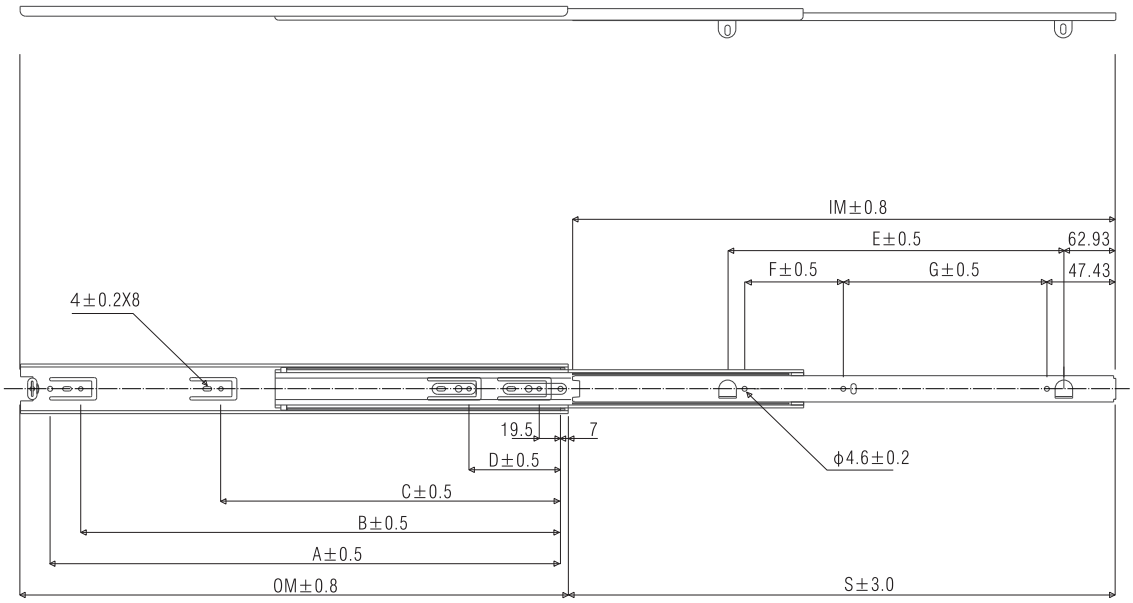

OM:Outer Member IM:Inner Member S:Stroke

ITEM	DRAWER LENGTH	S mm	OM mm	IM mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm	
300	300	300	300	296	273.0	253.0	-	157.0	207.0	218.1	57.9	
350	350	350	350	346	323.0	285.0	-	157.0	242.0	186.1	89.9	
400	400	400	400	395	373.0	317.0	-	157.0	277.0	154.1	121.9	
450	450	450	450	446	423.0	381.0	317.0	93.0	307.0	122.1	153.9	
500	500	500	500	496	473.0	445.0	317.0	93.0	307.0	90.1	185.9	
550	550	550	550	546	523.0	428.0	317.0	93.0	307.0	58.1	217.9	

4510 / 45mm slides

ILTOP

Single | **Full** | Over | Two-way | Lock | Self close | In/out | Bumper | Stopper

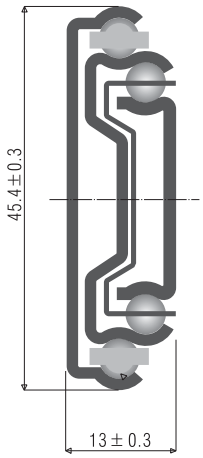



- Material : SPCC
- Finished : Zinc plated
- T : 13.0mm ± 0.3
- W :45.4mm ±0.3
- Load :40~50kg/set
- Type : Full extension slide
- Standard : 12" ~24"

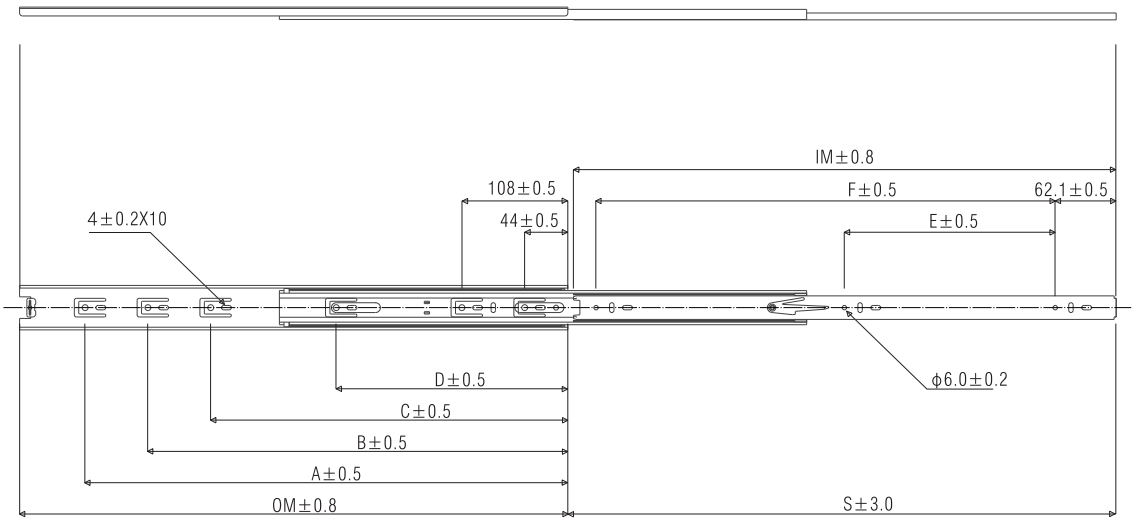

OM:Outer Member IM:Inner Member S:Stroke

ITEM	DRAWER LENGTH	S mm	OM mm	IM mm	A mm	B mm	C mm	D mm	E mm	F mm		
12	305	306	304.8	299.1	-	-	-	236.0	87.9	214.0		
14	360	357	355.6	349.9	-	-	300.0	236.0	113.3	264.8		
16	410	408	406.4	400.7	-	364.0	300.0	236.0	138.7	315.6		
18	460	458	457.2	451.5	-	364.0	300.0	236.0	164.1	366.4		
20	510	509	508.0	502.3	428.0	364.0	300.0	236.0	189.5	417.2		
22	560	560	558.8	553.1	492.0	428.0	364.0	236.0	214.9	468.0		
24	610	611	609.6	603.9	556.0	492.0	428.0	236.0	240.3	518.8		

4520 / 45mm slides

ILTOP

Single | Full | Over | Two-way | Lock | Self close | In/out | BUM Bumper | STOP Stopper

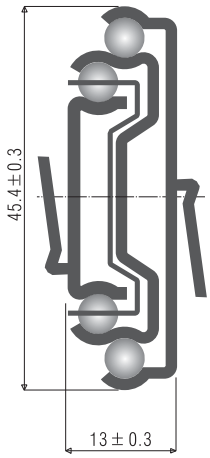



- Material : SPCC
- Finished : Zinc plated
- T : 13.0mm ± 0.3
- W :45.4mm ±0.3
- Load :40~50kg/set
- Type : Full extension slide
- Standard : 300mm ~550mm

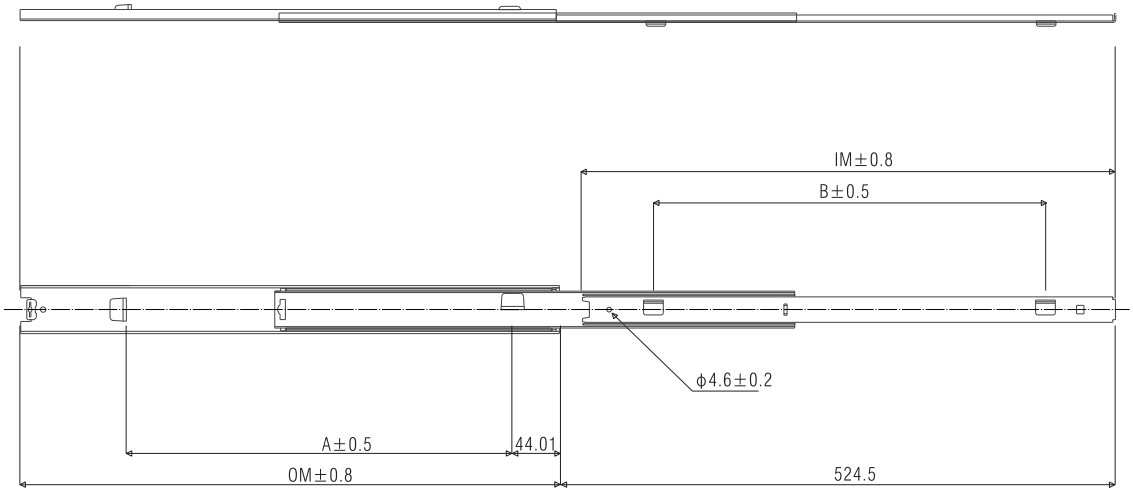

OM:Outer Member IM:Inner Member S:Stroke

ITEM	DRAWER LENGTH	S mm	OM mm	IM mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm	
300	300	300	300	296	273.0	253.0	-	157.0	207.0	218.1	57.9	
350	350	350	350	346	323.0	285.0	-	157.0	242.0	186.1	89.9	
400	400	400	400	395	373.0	317.0	-	157.0	277.0	154.1	121.9	
450	450	450	450	446	423.0	381.0	317.0	93.0	307.0	122.1	153.9	
500	500	500	500	496	473.0	445.0	317.0	93.0	307.0	90.1	185.9	
550	550	550	550	546	523.0	428.0	317.0	93.0	307.0	58.1	217.9	

4531 / 45mm slides

ILTOP

Single | Full | Over | Two-way | Lock | Self close | In/out | Bumper | Stopper

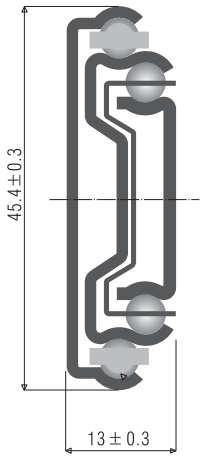



- Material : SPCC
- Finished : Zinc plated
- T : 13.0mm ± 0.3
- W :45.4mm ±0.3
- Load :40~50kg/set
- Type : Full extension slide
- Standard : 300mm~550mm
- Self Closing

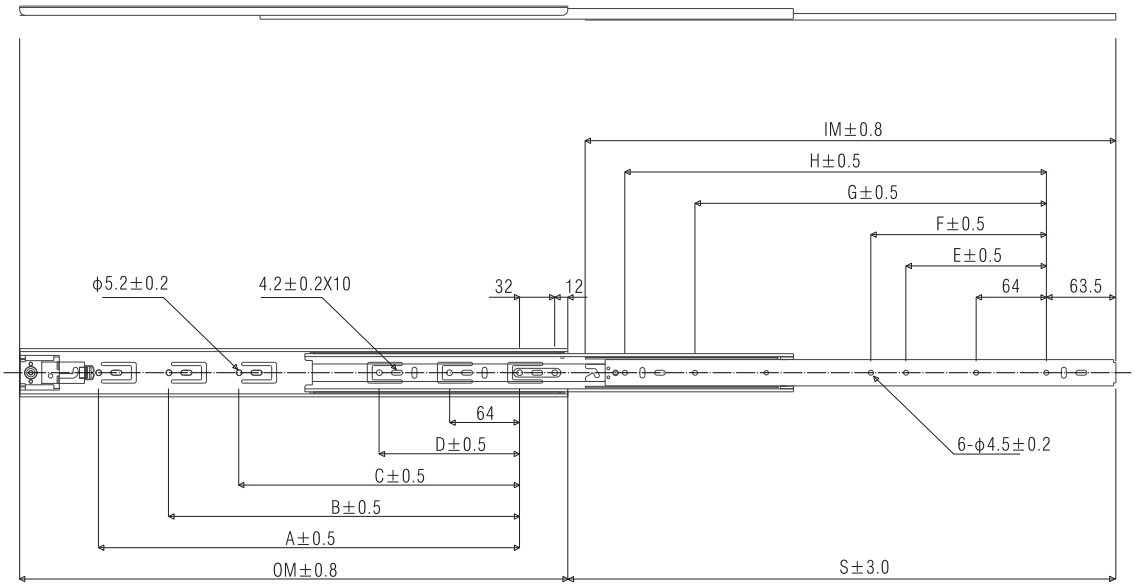

OM:Outer Member IM:Inner Member S:Stroke

MODEL	DRAWER LENGTH	S mm	OM mm	IM mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm
4531-300	300	300	300	282.0	176.0	-	-	-	-	-	120.5	184.5
4531-350	350	350	350	332.0	224.0	-	-	-	-	-	170.5	234.5
4531-400	400	400	400	382.0	256.0	192.0	-	-	78.0	110.0	220.5	284.5
4531-450	450	450	450	432.0	320.0	256.0	192.0	-	103.0	135.0	270.5	334.5
4531-500	500	500	500	482.0	384.0	320.0	256.0	-	128.0	160.0	320.5	384.5
4531-550	550	550	550	532.0	416.0	352.0	288.0	128.0	153.0	185.0	370.5	434.5